

**Kent County Road Commission**

**NPDES Municipal Separate Storm  
Sewer System (MS4)  
Illicit Discharge Elimination Plan**

**Prepared for:  
The Lower Grand River Watershed**

**August 1, 2013  
Project Nos. G120878**



**Fishbeck, Thompson, Carr & Huber**  
engineers • scientists • architects • constructors

**KENT COUNTY ROAD COMMISSION  
ILLCIT DISCHARGE ELIMINATION PLAN**

**PREPARED FOR:  
THE LOWER GRAND RIVER WATERSHED**

**AUGUST 1, 2013  
PROJECT NO. G120878**

# TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	IDEP GOALS.....	2
3.0	LEGAL AUTHORITY - IDEP ORDINANCES .....	3
4.0	OUTFALL AND DISCHARGE POINT LISTS .....	5
5.0	TRAINING .....	6
6.0	IDENTIFICATION AND ELIMINATION OF EXISTING ILLICIT DISCHARGES .....	7
6.1	Locating Problem Areas .....	7
6.2	Finding the Source.....	9
6.3	Removing/Correcting Illicit Discharges and Connections.....	11
7.0	MINIMIZING SEEPAGE FROM SEPTIC SYSTEMS AND SANITARY SEWERS.....	12
8.0	SPELL RESPONSE PROCEDURES .....	13
9.0	DOCUMENTATION AND REPORTING.....	16

## LIST OF FIGURES

Figure 1	Dry-weather Outfall Evaluation - Locating Problem Areas
Figure 2	Dry-weather Outfall Evaluation - Finding the Source
Figure 3	Dry-weather Screening Data Sheet

## LIST OF TABLES

Table 1	Field Testing Results Evaluation
Table 2	Stormwater Program Managers

## LIST OF APPENDICES

Appendix 1	Discussion of Indicator Parameters
Appendix 2	Prioritized List of Outfalls and Discharge Points
Appendix 3	Community Reporting Forms
Appendix 4	Interjurisdictional Agreement, Citizen Outreach Letter

## LIST OF ABBREVIATIONS/ACRONYMS

BMP	Best Management Practice
GVMC	Grand Valley Metropolitan Council
IDEP	Illicit Discharge Elimination Plan
KCDC	Kent County Drain Commissioner
KCRC	Kent County Road Commission
LGRW	Lower Grand River Watershed
MDEQ	Michigan Department of Environmental Quality
MS4	Municipal Separate Storm Sewer Systems
OSDS	Onsite Sewage Disposal Systems
PEAS	Pollution Emergency Alert System
PEP	Public Education Plan
SSOs	Sanitary Sewer Overflows
SWPPI	Stormwater Pollution Prevention Initiative

## 1.0 INTRODUCTION

This Illicit Discharge Elimination Plan (IDEP) has been prepared in accordance with the requirements of the General Permit Application for Storm Water Discharges from Municipal Separate Storm Sewer Systems (MS4) subject to watershed plan requirements. The IDEP is intended to prohibit and effectively eliminate illicit discharges to the MS4.

The IDEP is being implemented under a cooperative program administered by the Grand Valley Metropolitan Council (GVMC) and involving the county agencies and municipal units participating in the Watershed Approach.

The IDEP includes the following section headings:

- IDEP goals
- Legal authority
- Outfall and discharge point lists
- Identification and elimination of existing illicit discharges
  - Locating problem areas
  - Finding the source of illicit discharges
  - Removing/correcting illicit connections
- Minimizing seepage from septic systems and sanitary sewers
- Spill response procedures
- Preventive measures
- Documentation and reporting

## 2.0 IDEP GOALS

- Find, prioritize, and eliminate illicit discharges and illicit connections identified during dry-weather screening activities.
- Minimize infiltration of seepage from sanitary sewers and onsite sewage disposal systems (OSDS) into the MS4.
- Establish the legal authority for the community to eliminate illicit discharges found entering the MS4.
- Maintain a map of the MS4, point sources, and stormwater outfalls.
- Establish a system to document and report information regarding the IDEP including complaints, outfall screening, and illicit connections found and removed.
- Determine a method to evaluate the effectiveness of the illicit discharge elimination activities based on the watershed goals.

### 3.0 LEGAL AUTHORITY - IDEP ORDINANCES

Local ordinances, the Michigan Plumbing Code of 2000, the Michigan Drain Code of 1956, Michigan Act 451, and the Federal Clean Water Act provide the basic legal tools to implement the IDEP. Local ordinances effectively prohibit illicit connections and discharges; allow surveillance, monitoring, and inspections when needed; and provide enforcement authority and penalties.

An ordinance (or other regulatory mechanism where an ordinance is not feasible or appropriate) to effectively prohibit illicit discharges into the MS4 has been adopted by the following participating communities in the Lower Grand River Watershed (LGRW).

#### Participating Communities with an IDEP Ordinance

Community	Illicit Discharge and Connection Ordinance Adoption Date
Allendale Charter Township	May 10, 2004
Cascade Charter Township	June 23, 2004
East Grand Rapids, City of	September 19, 2005
Ferrysburg, City of	September 7, 2004
Georgetown Charter Township	August 12, 2002
Grand Haven, City of	February 5, 2007
Grand Rapids Charter Township	January 6, 2004
Grand Rapids, City of	July 2001
Grandville, City of	September 26, 2005
Hudsonville, City of	December 14, 2004
Kentwood, City of	October 24, 2004
Kent County Administration and Drain Commissioner	Regulatory mechanism in place
Kent County Road Commission	Regulatory mechanism in place
Plainfield Charter Township	November 6, 2000
Rockford, City of	August 8, 2005
Sparta, Village of	September 13, 2004
Spring Lake, Village of	January 16, 2006
Walker, City of	March 28, 2003
Wyoming, City of	October 3, 2005

Each ordinance or other regulatory mechanism:

- Regulates the contribution of pollutants to the MS4, owned by the permittee.
- Prohibits illicit discharges, including the direct dumping or disposal of materials, into the MS4, owned by the permittee.
- Establishes the authority to investigate, inspect, and monitor suspected illicit discharges into the MS4, owned by the permittee.
- Requires elimination of illicit discharges and connections into the MS4, owned by the permittee.

The Kent County Road Commission (KCRC) and the Kent County Drain Commissioner (KCDC) do not have ordinance authority; however, both agencies have regulatory mechanisms to address illicit discharges.

The KCDC has broad authority to control water pollution in county drains provided by the state Drain Code of 1956. The following are pertinent excerpts.

The Michigan Drain Code states:

*Sec. 423. (1) A person shall not continue to discharge or permit to be discharged into any county drain or intercounty drain of the state any sewage or waste matter capable of producing in the drain detrimental deposits, objectionable odor nuisance, injury to drainage conduits or structures, or capable of producing such pollution of the waters of the state receiving the flow from the drains as to injure livestock, destroy fish life, or be injurious to public health.*

*(10) Failure to comply with any of the provisions of this section subjects the offender to the penalties described in section 602.*

*Sec. 602. If any person shall willfully or maliciously remove any section or grade stake set along the line of any drain, or obstruct or injure any drain, he shall be deemed guilty of a misdemeanor, and upon conviction thereof shall be punished by a fine not exceeding \$100.00 and the costs of prosecution, or in default of the payment thereof, by imprisonment in the county jail not exceeding 90 days.*

The KCRC has limited authority under state law to control water pollution in statutory road right-of-ways. When evidence of an illicit discharge to a KCRC ditch or drain is found, and voluntary correction is not forthcoming, the KCRC will contact the appropriate agency, depending on the nature of the illicit discharge, and work with the KCDC, Kent County Health Department, local unit of government, local policing authority and/or the Michigan Department of Environmental Quality (MDEQ) to require elimination. The MDEQ has broad authority to control pollution, either directly or indirectly, to waters of the state provided by Act 451 of 1994.

A summary of indicators typically used to detect certain illicit discharges is included in Appendix 1.

## 4.0      **OUTFALL AND DISCHARGE POINT MAPS AND LISTS**

Lists of outfalls and discharge points are kept updated, identifying the location of all outfalls and discharge points the permittee owns and the names of all surface waters of the state that receive stormwater runoff from an MS4. The lists include a discrete identification number, the name of the receiving water, identification as an outfall or discharge point, the latitude and longitude, and the prioritization given to that point for screening purposes. Newly discovered outfalls and discharge points will be identified in the Progress Report. A copy of the current list of outfalls and discharge points is included in Appendix 2.



## 5.0 TRAINING

Municipal employees, who, as part of their normal job responsibilities, may come into contact with or otherwise observe an illicit discharge or illicit connection, will receive training on recognition and reporting of illicit discharges and connections. This will be accomplished through the IDEP training as identified in Appendix 2D of the SWPPI. Examples of training mechanisms identified in the SWPPI include the review of a Water Pollution Report Form with employees for recording and reporting suspected illicit discharges and an article to be distributed to employees (Appendix 3).

Field personnel will be provided additional training prior to conducting Dry-Weather Screening. Training will include health and safety, documentation and reporting procedures, and visual and olfactory outfall screening procedures. This will be accomplished by hands-on training by a professional engineer or other qualified individual for the field personnel by spring 2013. Alternatively, train-the-trainer sessions will be conducted for each community followed by community training of field personnel, if desired. Additional training will be provided for activities associated with sampling, identifying, and eliminating the source of unauthorized discharges and illicit connections. This will be accomplished, where needed, by hands-on training for the field personnel or by training-the-trainer for each community as appropriate.

## 6.0 IDENTIFICATION AND ELIMINATION OF EXISTING ILLICIT DISCHARGES

The field work to identify and eliminate illicit discharges and illicit connections will be completed in three steps. The initial step involves *Locating Problem Areas* and will focus on dry-weather screening stormwater outfalls for evidence of illicit discharges. The process is illustrated in Figure 1. The second step will be *Finding the Source* of any illicit discharges and will involve tracing illicit discharges through the stormwater drainage system to the source of the discharge or the illicit connection. This process is illustrated in Figure 2. The final step consists of *Removing/Correcting Illicit Connections*, which will require facilities to disconnect illicit connections and may require enforcement pursuant to existing ordinances and follow-up inspections. Information and test results are recorded on a data sheet, included as Figure 3.

### 6.1 LOCATING PROBLEM AREAS

Locating the presence of unauthorized discharges to the KCRC storm sewer system will be conducted during the permit cycle using the following prioritization:

- **High Priority** - Outfalls to waters of the state within urbanized areas that are or have been reported by the public as being suspicious, those serving areas suspected of having illicit discharges and rapidly developing areas with ongoing sediment complaints.
- **Medium-High Priority** - High density commercial, industrial areas and any other areas where land use would indicate problems may occur and also where past dry weather flow evaluation was required.
- **Medium Priority** - MS4 to MS4 discharge points within urbanized areas when notified by another entity that a discharge has occurred.
- **Low Priority** - Where there was no dry-weather flow during past rounds of testing and no further action is required and outfalls that are within the watershed but outside the urbanized area.

All high priority will or have received dry-weather screening during the 2008-2013 cycle. The next round of dry-weather screening for all high and medium-high priority outfalls will be scheduled by 2023 unless reports of suspected illicit discharges warrant expedited screening or investigation.

- Preferably, dry-weather screening will not commence until at least 48 hours after any rainfall event, but may commence if less than 0.1 inch of rain occurred during the previous 48 hours. Optionally, the field crew will attempt to identify known legitimate dry-weather discharges prior to conducting the field work. Dry-weather screening of all MS4 discharge points will be completed in accordance with the following, and as illustrated in Figure 1:
  - Locate outfall/discharge point, complete data sheet with site information.
  - If new outfall/discharge point, assign identification number and mark location on map.

- If flow apparent, test discharge with field kit for temperature, pH, ammonia, and surfactants, collect additional sample if necessary, and record flow information and test results on data sheet. Readily observable sources of flow to the storm sewer will be noted. For example, landscape irrigation may be misdirected onto impermeable surfaces or irrigation runoff may be entering the drainage system.
    - Assign follow-up prioritization
      - Immediate - report to appropriate agency when discharge found, agency to follow up within one week.
      - High - notify stormwater manager, follow up with 30 days.
      - Low - notify stormwater manager conduct visual observations within 3 months.
    - In follow-up visits, test flow again with field test kits. If test results still indicate follow up necessary, collect additional samples for lab analysis, if necessary, and follow steps in “Finding the Source” section below.
  - If no flow apparent, evaluate the areas for indicators of pollution, i.e. the presence of algae, unusual vegetative growth, staining, bacterial sheens, or debris.
    - If indicators show a sign that pollution may exist, assign follow-up prioritization.
      - Immediate - report to appropriate agency when discharge found, agency to follow up within one week to check for dry-weather flow.
      - High - notify stormwater manager; follow up with 30 days to check for dry-weather flow.
      - Low - notify stormwater manager, conduct visual observations within 3 months for dry-weather flow.
    - In follow-up visits, if flow present, test with field test kits. If test results indicate follow up necessary, collect additional samples for lab analysis, if necessary, and follow steps in “Finding the Source” section below. If no flow is present on immediate or high priority sites, proceed to steps in “Finding the Source” section below.
  - If no dry-weather flow is present and no indication that pollution may exist, close outfall file.
  - If the outfall is submerged or otherwise unsafe to approach, the next available and safe location upstream from the outfall will be screened.
- The results of the Dry-Weather Screening will be ranked according to the guide in Table 1 and then used to locate problem areas and prioritize the locations for finding the source:
    - **Immediate** - If, in the opinion of the field crew, immediate action to address the dry-weather flow is indicated, the field crew will inform the stormwater program manager, or the appropriate agency if health or safety is a concern, record the incident, and ensure that the agency investigates the site within one week. Table 2 is a list of the current stormwater program managers and their contact information.
    - **High** - If flow is present and test results indicate follow up is necessary, but it does not appear to be of immediate concern, the stormwater manager will be notified and follow-up will be pursued

within 30 days. If flow is again present, field crews will use field test kits to confirm results, and begin conducting dry-weather screening at accessible points upstream of the discharge until a potential source is found.

- **Low** - If flow is present but test results indicate the discharge is most likely exempt, (groundwater for example), the site will be observed within 3 month to determine if conditions have changed and repeat testing is warranted.
  - **None** - No follow-up is needed.
- A field form will document the results of outfall screening and testing. A copy of the form is included as Figure 3. A separate form will be utilized for each visit.
  - Any new or additional stormwater outfalls or discharge points will be reported in the next Progress Report.
  - An illicit discharge reporting process (telephone, email, or other method) has been implemented. A system to log reports, assign them for follow-up, and document results of investigations is included in the process. Experience has shown that the most reliable reports come from municipal personnel; however, this reporting process has been coordinated with the Public Education Plan (PEP) in order to encourage the public to observe and notify county or local governmental units when illegal dumping or illicit discharges are suspected. The Community Reporting Forms are included in Appendix 3. A letter from the KCRC to citizens describing the reason for these investigations is also included in Appendix 3. This letter is sent to citizens who inquire about the activities of the Road Commission.
  - Each community's schedule for completing the dry-weather screening will be consistent with the screening priority identification of their outfalls and discharge points as identified in Appendix 2.

## 6.2 FINDING THE SOURCE

The field investigation necessary to find the source of illicit discharges will be completed based on the results of the efforts in *Locating Problem Areas*. The process is illustrated in a flowchart in Figure 2.

Sites identified during the initial investigation that pose a significant and immediate health or environmental problem (immediate priority) will be brought to the attention of the community's stormwater program manager (Table 2), at the time the discharge is detected, and the appropriate agency or department; such as the Kent or Ottawa County Health Department, an adjacent community, or the MDEQ. That appropriate agency may provide useful information or assistance for the follow-up investigation within one week. Additional sample collection and laboratory analysis for parameters such as, fluoride, copper, phosphorus, ammonia, nitrite, nitrate, and *E. coli* will be considered, depending on the land use and suspected source of the illicit discharge.

The process for tracing illicit discharges that do not pose a significant and immediate health or environmental problem (high priority) to their source will be based on factors such as whether the area is known to have high bacteria problems or vulnerability to bacterial contamination, significant industrial or commercial development, dense housing without sanitary sewer connections, public notification or complaints, and the sensitivity of the receiving stream.

The exact procedure for tracking the illicit discharge will depend on the particular facts of each incident. Generally, if the discharge can be tracked by direct visual observation, the responsible party will be contacted and required to eliminate the discharge. If the source is not obvious, then manhole to manhole observations will be made to identify the source until the responsible party is identified and contacted.

If the source is still not identified through upstream investigations, more sophisticated means will be utilized such as,

- Televising the storm sewers or dye testing premises in the vicinity of a suspected illicit connection.
- Investigation of permissible point sources located upstream of outfalls with documented dry-weather flow.
- Investigation of complaints, reports, or notification of suspected illicit discharges.
- Distribution of letters to residents and businesses alerting them to the problem that is under investigation and soliciting their assistance in finding the source of an illicit discharge.
- A building-by-building evaluation where a potential illicit connection has been isolated to a small area.

If a low-priority outfall was found to have similar test results in 3 months, the stormwater program manager will follow the steps outlined above to find the source and determine if the source of flow is exempt or requires the responsible party to be notified and the discharge eliminated.

If the source of an illicit discharge is traced to an MS4 owned by another permittee, the upstream stormwater program manager will be notified within one week of detection unless the severity of the discharge warrants immediate action. The stormwater program managers of all participating communities of the LGRW that own discharge points that enter another MS4 have agreed to coordinate tracking and eliminating illicit discharges in these situations. The agreement is included as Appendix 4. Notification will consist of a phone call or email to the upstream MS4 stormwater program manager. The notification will include identifying the date and location where the suspected illicit discharge was detected and any other information about the discharge that will assist with the identification of its source. The notification will be recorded and supplemented by transmittal of the IDEP Dry-Weather Screening Data Sheet. The upstream MS4 stormwater program manager will then process the following steps outlined above.

The continuous communication between the community's stormwater program manager, the field crew, and other agencies during the investigation will ensure appropriate and timely actions are taken to find the source of an illicit discharge.

### **6.3 REMOVING/CORRECTING ILLICIT DISCHARGES AND CONNECTIONS**

Those responsible for illicit connections will be notified to correct the problem. The property owner will be required to implement appropriate best management practices (BMPs) to eliminate the potential for illicit discharges, according to the community's ordinance or regulatory mechanism. A follow-up inspection will be conducted to ensure the correction is satisfactorily completed. Persons responsible for illicit discharges, including spill or dumping incidents, will be investigated and required to pursue reasonable clean-up. Where appropriate, they will be required to demonstrate taking measures to ensure that similar incidents will not occur. All illicit discharges should be eliminated as soon as practical taking into consideration the pollution potential of the discharge, the cost of elimination, and the measures needed to eliminate the discharge. Appropriate fines, penalties, and litigation will be considered.

## 7.0 MINIMIZING SEEPAGE FROM SEPTIC SYSTEMS AND SANITARY SEWERS

Each community will coordinate its IDEP with the local health department to assist in mitigating problems with failing OSDS. An OSDS found during the implementation of the IDEP to be infiltrating into a MS4 will be referred to the local health department.

A formal complaint is recorded when the local health department is informed that a septic system is in a state of failure. The field sanitarian responsible for that area visits the site to verify the condition of the septic system. The homeowner is ordered to pump the septic tanks, apply for a septic permit, and correct the situation in a timely manner if a public health hazard is determined to exist. Failure to comply with an order from the local health department can result in monetary penalties and/or condemnation of the dwelling as unfit for human habitation. The property owner will be encouraged to connect to the sanitary sewer where feasible. If sanitary sewers are not available, short- and long-term solutions for sewage disposal will be determined.

Each community will continue to conduct a preventative maintenance program on its wastewater collection and stormwater systems according to their Stormwater Pollution Preventive Initiatives (SWPPIs). The maintenance may involve routine cleaning and/or television inspections that provide good assessments of pipe conditions and locates sites needing repairs. Each community will correct any sanitary system deficiencies identified in order to minimize exfiltration and seepage of sewage into the groundwater or stormwater drainage system. The potential for seepage from sanitary sewers into the stormwater drainage system will be investigated in the process of *Finding the Source* of illicit discharges. Sanitary sewer overflows (SSOs) or cross connections to a storm sewer will be corrected as soon as possible or in accordance with a state compliance action.

NOTE: Some communities rely on others for sewerage services and have little direct control over their operation and maintenance.

## 8.0 SPILL RESPONSE PROCEDURES

Reports by the public or municipal personnel of spills or suspicious discharges will be pursued by trained individuals. Persons responsible for illicit discharges, including spill or dumping incidents, will be investigated and compelled to pursue reasonable clean-up. Where appropriate, they will be required to demonstrate taking measures to ensure similar incidents will not occur. Appropriate fines, penalties, and litigation will be considered.

If a spill or suspicious discharge is found or reported, the stormwater program manager will be notified and initial information will be gathered. Records will be maintained regarding the incident from the first report to resolution. The Community Reporting Form is included in Appendix 3. Based on the initial information the stormwater coordinator will assess the severity of the situation. All reports will be considered an emergency until it is determined to be a non-emergency. Therefore, the Emergency Procedure will be implemented until the stormwater program manager determines that the incident is a non-emergency, at which point the Non-Emergency Procedure will be implemented.

The MDEQ supports the appropriate participation of its employees in emergency response activities for the purpose of protecting public health and the environment. In general, the MDEQ employees do not serve as "first responder" personnel. Rather, the MDEQ staff serve as technical consultants to, and coordinate their activity with, an on-scene incident commander, usually the local fire chief and/or a responsible party. Staff may serve as technical consultants either at the site of the emergency or by telephone or other means of communication.

### Emergency Procedure

- 1) Is public safety at immediate risk? If yes, notify law enforcement and report to National Response Center.
- 2) Notify and solicit aid from other nearby or affected agencies, e.g. County Drain Commissioner and Road Commission. Engage Environmental Response Contractor, if needed.
- 3) If caused by Municipal Operations, report to the MDEQ District Office or Pollution Emergency Alert System (PEAS) if afterhours. If it is a Part 5 Rules material (oil causing visible sheen or >50 pounds of salt or listed pollutants over certain amounts) also report to 9-1-1.
- 4) If consistent with personnel safety, attempt to track the spill to its source. Gather more detailed and accurate information. Engage the responsible party. Attempt to persuade responsible party to take primary responsibility for preventing further damage and to initiate clean-up.
- 5) Attempt to stop the discharge through cooperation with responsible party or by utilizing internal resources or environmental response contractor.
- 6) Attempt to block the flow of pollutants to prevent further damage and to facilitate capture of spilled material.
- 7) Consider environmental monitoring to measure damage.



- 8) Clean up spilled material. Dispose as hazardous waste or liquid industrial waste.
- 9) Prepare written report to the MDEQ District Office within 10 days. Send a copy to the local health department.
- 10) Consider requiring the responsible party to implement procedures or to install facilities to ensure the incident does not occur again.
- 11) Consider civil and/or criminal actions.

**Important Phone Numbers**

MDEQ Grand Rapids District Office - (616) 356-0500  
 MDEQ PEAS - 1-800-292-4706 (calls from out-of-state- 1-517-373-7660)  
 National Response Center - 1-800-424-8802 or [www.nrc.uscg.mil/nrchp.html](http://www.nrc.uscg.mil/nrchp.html)  
 Kent County Drain Commissioner - (616) 336-3688  
 Ottawa County Drain Commissioner - (616) 994-4530

**Potential Environmental Response Contractors**

(Inclusion here does not imply any approval or any endorsement or qualifications; contacts are provided for convenience in an emergency only. Communities are encouraged to select a contractor before an emergency situation occurs.)

Young's Environmental Cleanup, Inc. Grand Rapids Area Office 4990 West River Drive, NE Comstock Park, MI 49321 Phone: (616) 785-3374 Fax: (616) 785-3401 24 hr: 1-800-4Youngs (496-8647) <a href="http://www.youngsenvironmental.com/">http://www.youngsenvironmental.com/</a>	Plummer's Environmental Services, Inc. 10075 Sedroc Industrial Drive Byron Center, MI 49315 Toll Free: 1-800-878-3996 Office: 1-616-877-3930 Fax: 1-616-877-3937 <a href="http://www.plummersenvironmental.com/index.aspx">www.plummersenvironmental.com/index.aspx</a>
K&D Industrial Services, Inc. Corporate Offices Romulus, MI 48174 (734) 722-8922 Fax: (734) 729-8220 Grand Rapids Branch 2629 Prairie Road Wyoming, MI 49519 (616) 784-8900 Fax: (616) 534-5782 <a href="http://kdigroup.com/">http://kdigroup.com/</a>	Valley City Environmental Service 1040 Market Avenue, SW Grand Rapids, MI (616) 235-1500 Fax (616) 235-9507 24 hr Emergency Spill Response Numbers Please call 800.678.7035 / 616.235.1500 <a href="http://www.valleycityes.com/">http://www.valleycityes.com/</a>

**Non-Emergency Procedure**

- 1) Determine a level of urgency based on the nature of the spill and likely impact on health, safety, and environment.
- 2) If consistent with personnel safety, attempt to track the spill to its source. Gather more detailed and accurate information. Engage the responsible party. Attempt to persuade responsible party to take primary responsibility for preventing further damage and to initiate clean-up.
- 3) Report to the MDEQ District Office, or PEAS if after business hours.
- 4) Determine if internal resources are sufficient or if an Environmental Response Contractor is needed.
- 5) Attempt to stop the discharge through cooperation with responsible party or by utilizing internal resources or environmental response contractor.
- 6) Attempt to block the flow of pollutants to prevent further damage and to facilitate capture.
- 7) Clean up spilled material. Dispose as hazardous waste or liquid industrial waste.
- 8) Prepare written report to the MDEQ District Office within 10 days.
- 9) Consider requiring the responsible party to implement procedures or to install facilities to ensure the incident does not occur again.


## 9.0 DOCUMENTATION AND REPORTING

Progress Reports will be submitted to the MDEQ on the implementation status of the IDEP. The report will cover all of the decisions, actions, and results performed as part of the IDEP during the previous reporting period. The Progress Report will include:

- Documentation of actions taken to eliminate illicit discharges.
- For significant illicit discharges, a list of pollutants of concern, the estimated volume and load discharged, and the locations of the discharge into both the separate storm sewer system and the receiving water.
- The status of the program to minimize seepage from sanitary sewers and OSDS into the separate storm sewer system.
- Updated outfall mapping.
- A schedule for elimination of illicit connections that have been identified, but have yet to be eliminated.
- An evaluation of the effectiveness of the IDEP program. The evaluation will include:
  - An evaluation of the effectiveness of the detection methods used based on the number of illicit discharges detected.
  - An estimated quantification of the number of discharges prevented or eliminated.
  - An estimated quantification of the volume of illicit flow eliminated.
  - An assessment of the effectiveness of the program overall.

The goal of the program is to have a drainage system with no illicit discharges.

# Figures

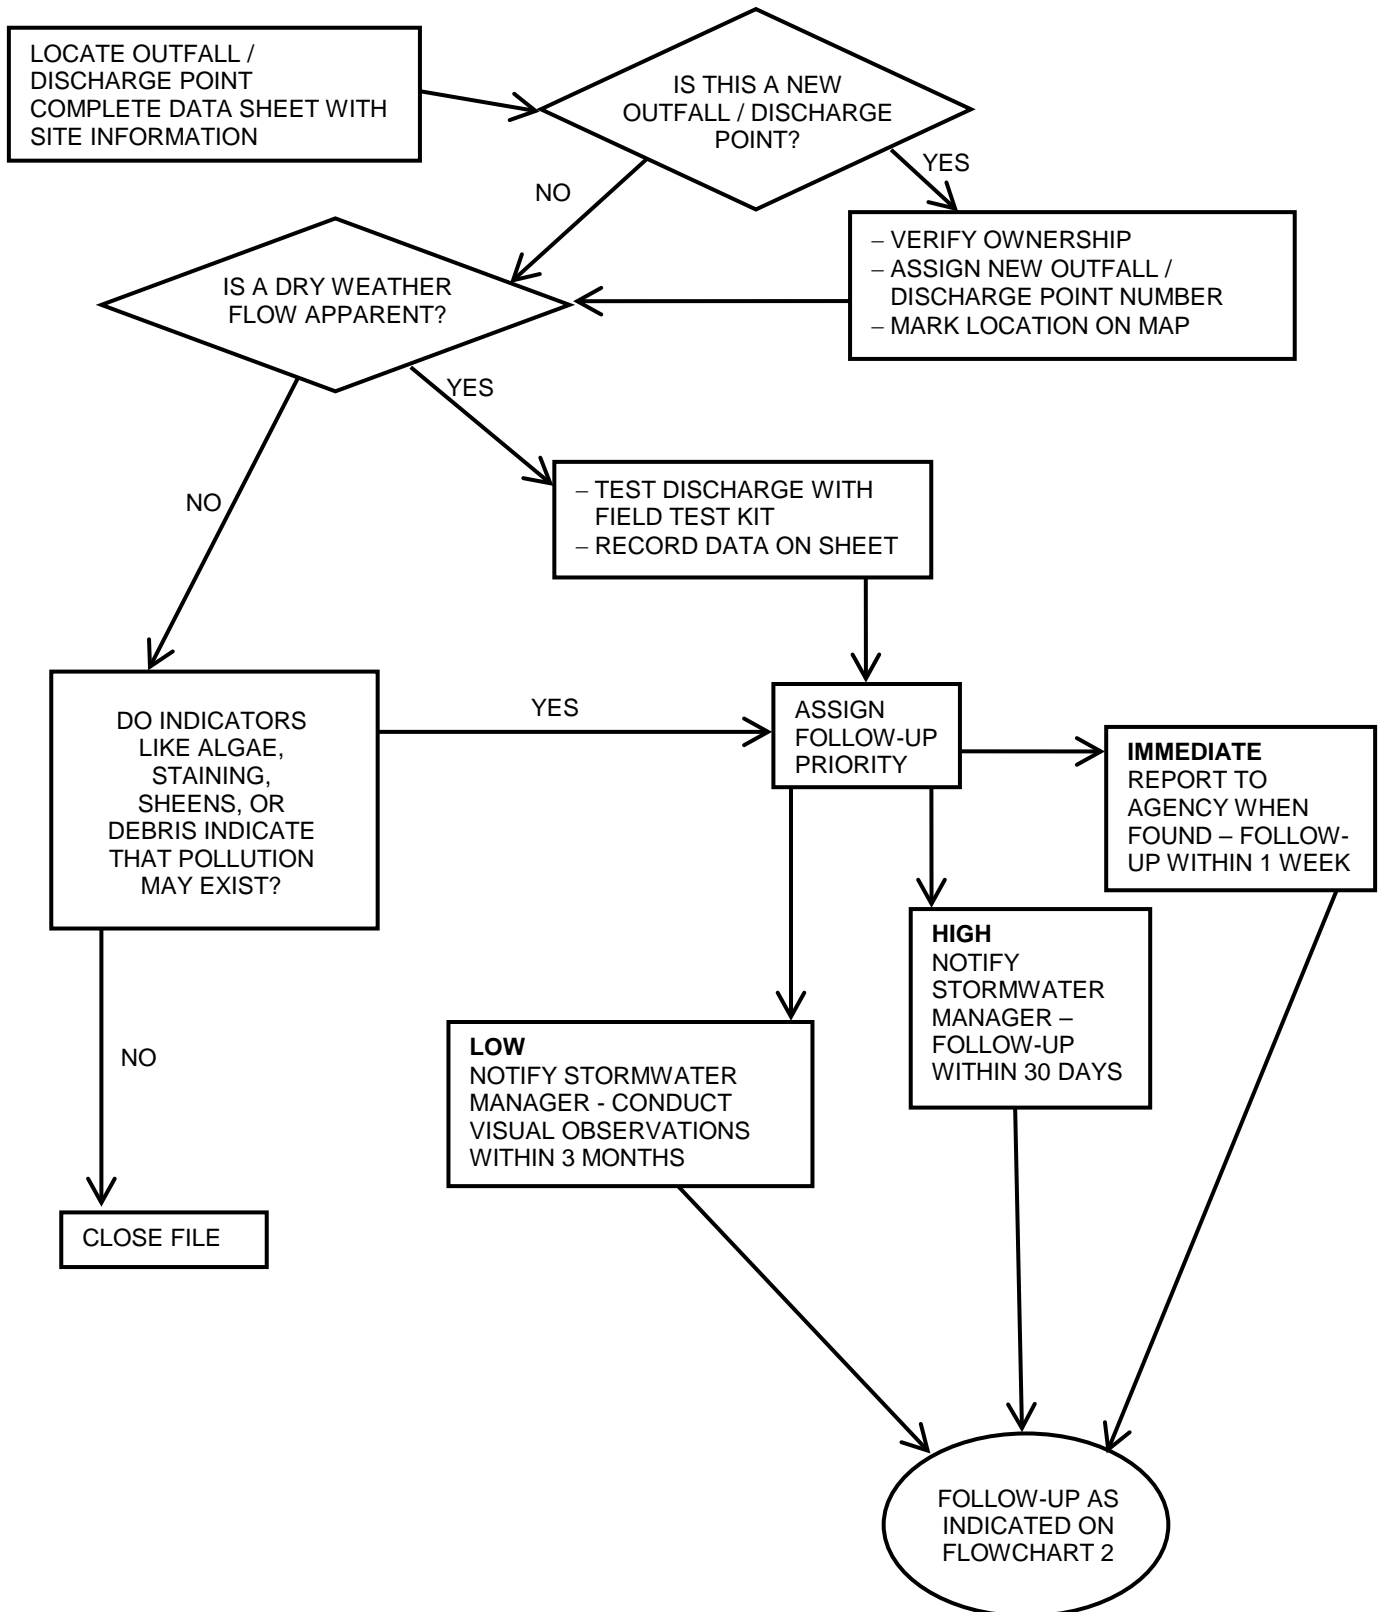

**FIGURE 1: LOCATING PROBLEM AREAS**

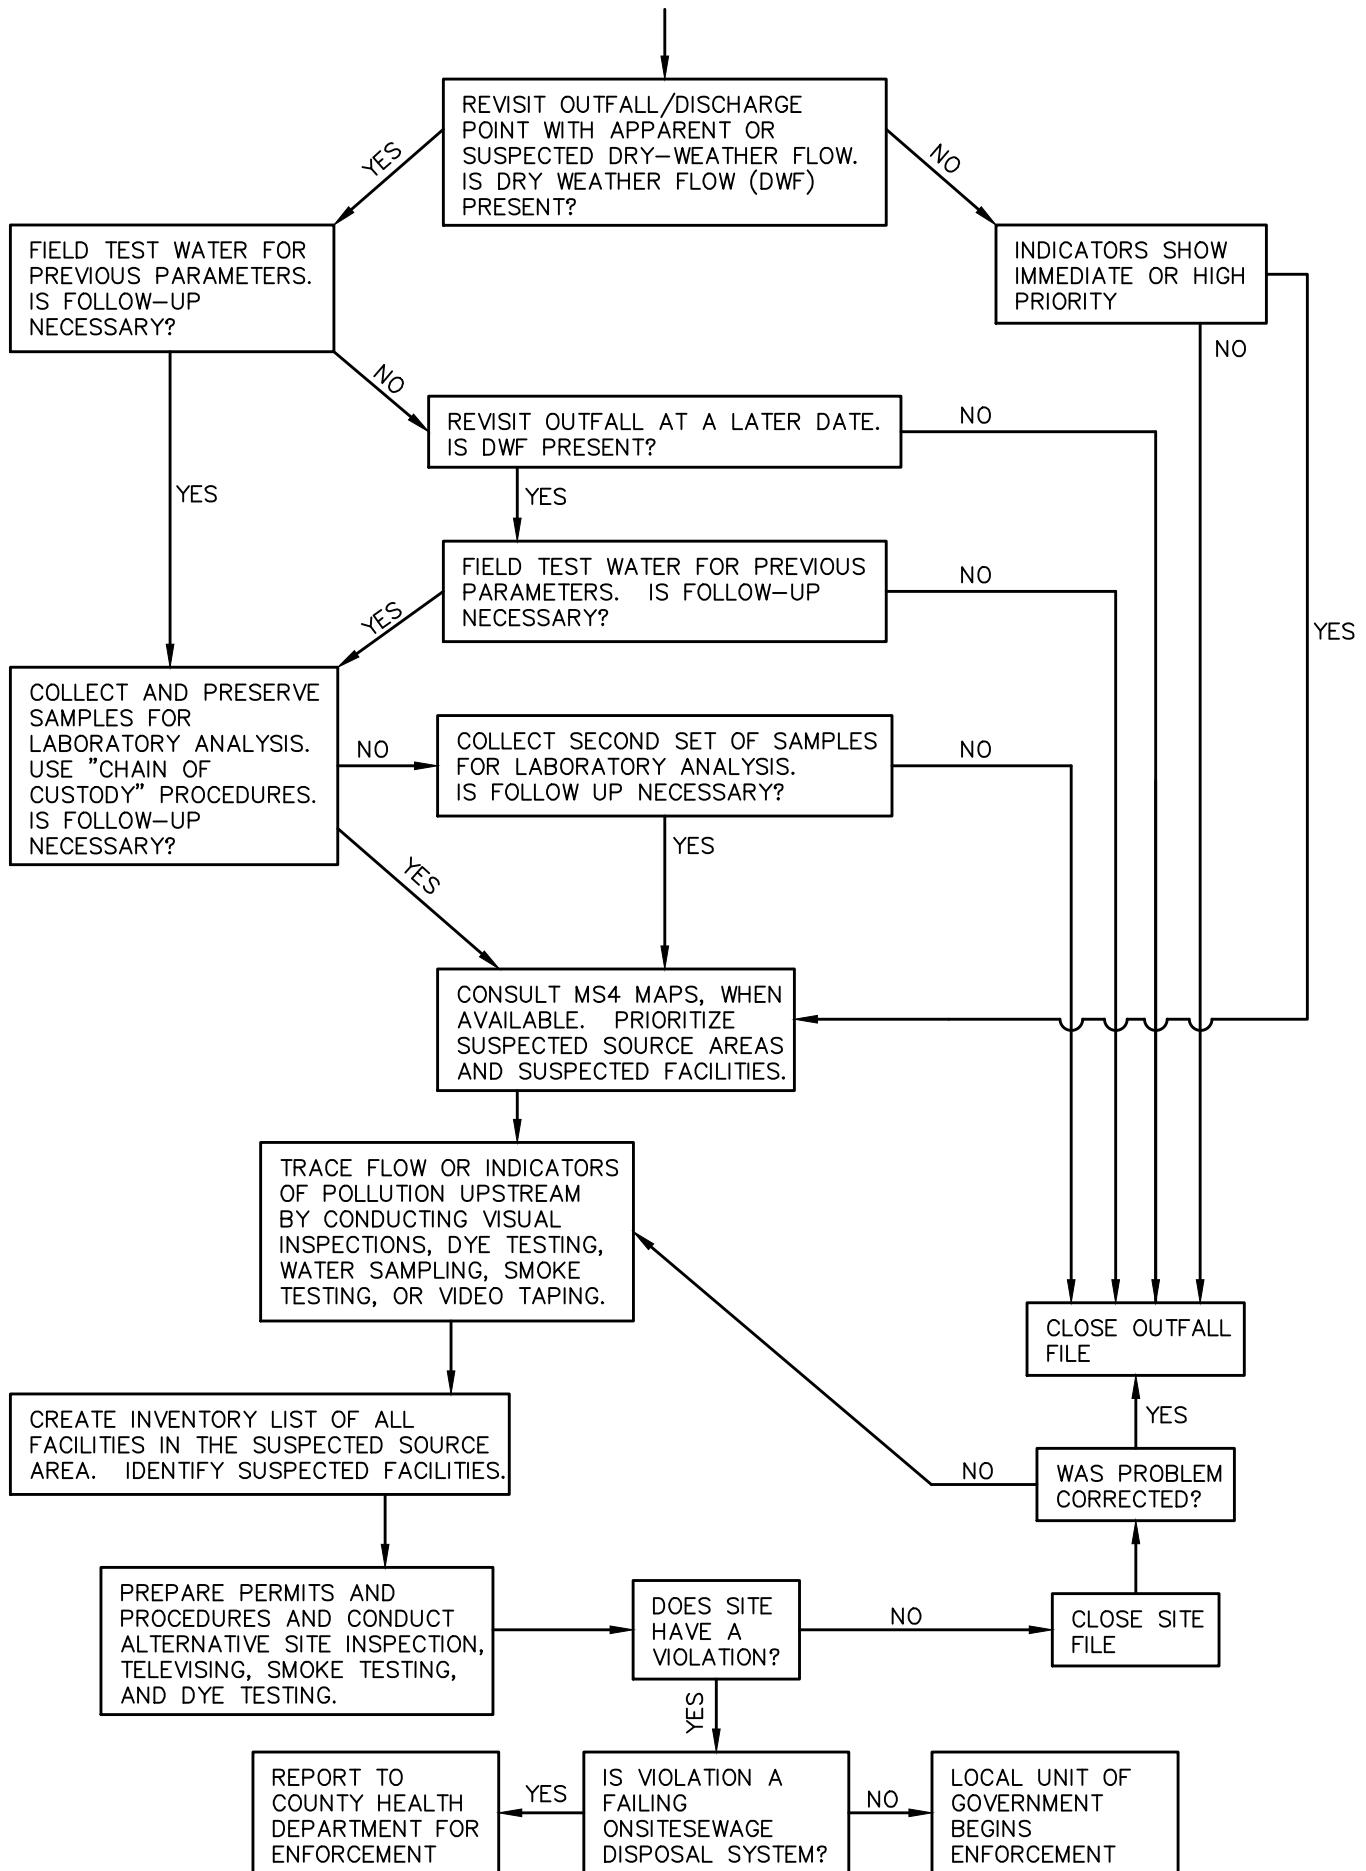


FIGURE 2: FINDING THE SOURCE

**IDEP DRY WEATHER SCREENING DATA SHEET**



**GENERAL**

**Outfall ID**

Date \_\_\_\_\_ Time \_\_\_\_\_ Air Temp \_\_\_\_\_ °F Receiving Water \_\_\_\_\_  
 Crew Name \_\_\_\_\_ Date of Last Rain \_\_\_\_\_  Clear/Sunny  
 Photograph # \_\_\_\_\_  Partly Cloudy  
 GPS Coordinates \_\_\_\_\_ °N \_\_\_\_\_ °W (decimal degrees)  Overcast

**TYPE OF OUTFALL**

**Material & Size**

(in) Concrete  (in) PVC  
 (in) RCP  (in) Metal  
 (in) CMP  (in) Clay  
 (in) CPP  (ft) Ditch  
 (in) Other-describe below \_\_\_\_\_

**Condition**

Like New  
 Good  
 Broken  
 Impaired

**Flow Observations**

(in) Depth of flow in outfall  
 Standing water in pipe, no flow  
 Trace, insufficient to quantify  
 Dry, no water present

If evidence of Illicit Connection, describe below \_\_\_\_\_

**FLOW OBSERVATIONS (skip if no water present in outfall)**

**Odor**  None  Musty  Sewage  Rotten Egg  Gasoline  Oil  Other\*\*  
**Color**  Clear  Light Brown  Dark Brown  Green  Grey  Black  Other\*\*  
**Turbidity**  Clear  Slightly  Moderate  Highly  Opaque  Other\*\*  
**Floatables**  None  Trash  Sewage  Foam  Oil Sheen  Other\*\*

**OUTFALL AREA OBSERVATIONS**

**Deposits/Stains**  None  Mineral  Sediment  Oily  Grease  Other\*\*  
**Vegetation**  None  Normal  Excessive  Algae  Other\*\*  
**Debris**  None  Tissue  Other\*\*  
 \*\*If Other, include comments \_\_\_\_\_

**OTHER OBSERVATIONS NEAR OUTFALL**

**Pollution Source**  Debris/Trash  Construction Runoff  Road Crossing  
 Septic System  Streambank Erosion  Gully Erosion  
 Upland Source  Tile Outlet  Other\*\*  
**Stream Bottom**  Cobble/Gravel  Sand (coarse)  Muck/Silt (fine)  
 Hardpan (solid clay)  Artificial  Other\*\*  
 \*\*If Other, include comments \_\_\_\_\_

**FIELD TEST KIT ANALYSES**

<u>Parameter</u>	<u>Value</u>	<u>Units</u>
pH	_____	SU
Surfactants	_____	H, M, L, or None
Ammonia	_____	mg/L
Temperature	_____	°F

**OTHER ANALYSES**

<u>Parameter</u>	<u>Value</u>	<u>Units</u>	<u>Parameter</u>	<u>Value</u>	<u>Units</u>
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

**Follow Up**  None  High Priority  Other - explain \_\_\_\_\_  
 Low Priority  Immediate \_\_\_\_\_  
 \_\_\_\_\_ Additional information on attached sheet

**Comments**

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Check if more comments are on the back

**Figure 2**

# Tables



**Table 1 - Field Testing Results Evaluation Guidelines**

Parameter	Test Range	None	Low	High	Immediate
Temperature °F	32-100	44 - 75	40 - 43 or 76 - 85	32 - 39 or 86 - 99	<32 or >100
pH	0-14	6 - 9.5	5 - 6 or 9.5 - 10.5	4 - 5 or 10.5 - 11	<4 or >11
Surfactants	detect presence	none	low or medium	high	
Ammonia ppm	0-6	0 - 1	1 - 3	3 - 6	>6

**Table 2 – Storm Water Program Managers**

<b>Permittee</b>	<b>Storm Water Program Manager</b>	<b>Telephone Email</b>
Allendale Charter Township	Mr. Jerry Alkema, Township Supervisor	(616) 895-6295 ext. 12 jerryalkema@allendale-twp.org
Cascade Charter Township	Mr. Steve Peterson Township Planner	(616) 949-1500 speterson@cascadetwp.com
East Grand Rapids, City of	Mr. Ken Feldt, Public Works Director	(616) 940-4817 kfeldt@eastgr.org
Ferrysburg, City of	Mr. Craig Bessinger, City Manager	(616) 842-5803 cbessinger@ferrysburg.org
Forest Hills Public Schools	Mr. Ron Boezwinkle, Director of Operations	(616) 493.8780 rboezwin@fhps.net
Georgetown Charter Township	Mr. Mike Hatkowski, Operations Coordinator	(616) 662-2800 mhatkowski@georgetown-mi.gov
Grand Haven, City of	Mr. William Hunter, Director of Public Works	(616) 855-5809 bhunter@grandhaven.org
Grand Rapids Charter Township	Mr. RJ Versluys Deputy Chief	(616) 361-7391 bversluys@grandrapidstwp.org
Grand Rapids, City of	Ms. Carrie Rivette Project Engineer	(616) 456-3057 crivette@grcity.us
Grandville, City of	Mr. Ron Carr, Director of Public Works	(616) 538-1990 carr@cityofgrandville.com
Hudsonville, City of	Mr. Dutch Besteman, Public Works Superintendent	(616) 669-0200 ext. 1424 dbestema@hudsonville.org
Kent County Drain Commissioner and Admin.	Mr. Douglas Spote, Deputy Drain Commissioner	(616) 336-3688 Doug.Spote@Kentcountymi.gov
Kent County Road Commission	Mr. Wayne Harrall, Director of Engineering	(616) 242-6914 wharrall@kentcountyroads.net
Kentwood, City of	Mr. Ronald Woods, Director of Public Works	(616) 554-0824 woods@ci.kentwood.mi.us
Plainfield Charter Township	Mr. Rick Solle, Director of Public Services	(616) 363-9660 soller@plainfieldchartertp.org
Rockford, City of	Mr. Jamie Davies, Public Services Director	616-893-0938 jdavies@rockford.mi.us
Sparta, Village of	Mr. Miles Ring, DPW Superintendent	(616) 262-7901 dpwdept@spartami.org
Spring Lake, Village of	Ms. Chris Burns Village Manager	(616) 842-1393 ext. 1002 christine@springlakevillage.org
Walker, City of	Ms. Bonnie Broadwater, Engineering Programs Coordinator	(616) 791-6327 bbroadwa@ci.walker.mi.us
Wyoming, City of	Mr. Aaron Vis, Environmental Services Inspector	(616) 261-3593 avis@wyomingmi.gov

# Appendix 1

# Appendix 1

---

Excerpts from  
Illicit Discharge Detection and Elimination - A Guidance Manual for Program  
Development and Technical Assessments  
By Edward Brown and Deb Caraco, Center for Watershed Protection, Ellicott City,  
Maryland 21043  
and Robert Pitt, University of Alabama, Tuscaloosa, Alabama 35487  
October 2004

## Ammonia

Ammonia is a good indicator of sewage, since its concentration is much higher there than in groundwater or tap water. High ammonia concentrations may also indicate liquid wastes from some industrial sites. Ammonia is relatively simple and safe to analyze. Some challenges include the tendency for ammonia to volatilize (i.e., turn into a gas and become non-conservative) and its potential generation from non-human sources, such as pets or wildlife.

## Boron

Boron is an element present in the compound borax, which is often found in detergent and soap formulations. Consequently, boron is a good potential indicator for both laundry wash water and sewage. Preliminary research from Alabama supports this contention, particularly when it is combined with other detergent indicators, such as surfactants (Pitt, IDDE Project Support Material). Boron may not be a useful indicator everywhere in the country since it may be found at elevated levels in groundwater in some regions and is a common ingredient in water softeners products. Program managers should collect data on boron concentrations in local tap water and groundwater sources to confirm whether it will be an effective indicator of illicit discharges.

## Chlorine

Chlorine is used throughout the country to disinfect tap water, except where private wells provide the water supply. Chlorine concentrations in tap water tend to be significantly higher than most other discharge types. Unfortunately, chlorine is extremely volatile, and even moderate levels of organic materials can cause chlorine levels to drop below detection levels. Because chlorine is non-conservative, it is not a reliable indicator, although if very high chlorine levels are measured, it is a strong indication of a water line break, swimming pool discharge, or industrial discharge from a chlorine bleaching process.

## Color

Color is a numeric computation of the color observed in a water quality sample, as measured in cobalt-platinum units (APHA, 1998). Both industrial liquid wastes and sewage tend to have elevated color values. Unfortunately, some "clean" flow types can also have high color values. Field testing by Pitt (IDDE Project Support Material) found high color values associated for all contaminated flows, but also many uncontaminated flows, which yielded numerous false

positives. Overall, color may be a good first screen for problem outfalls, but needs to be supplemented by other indicator parameters.

### Conductivity

Conductivity, or specific conductance, is a measure of how easily electricity can flow through a water sample. Conductivity is often strongly correlated with the total amount of dissolved material in water, known as Total Dissolved Solids. The utility of conductivity as an indicator depends on whether concentrations are elevated in “natural” or clean waters. In particular, conductivity is a poor indicator of illicit discharge in estuarine waters or in northern regions where deicing salts are used (both have high conductivity readings). Field testing in Alabama suggests that conductivity has limited value to detect sewage or wash water (Pitt, IDDE Project Support Material). Conductivity has some value in detecting industrial discharges that can exhibit extremely high conductivity readings. Conductivity is extremely easy to measure with field probes, so it has the potential to be a useful supplemental indicator in subwatersheds that are dominated by industrial land uses.

### Detergents

Most illicit discharges have elevated concentration of detergents. Sewage and washwater discharges contain detergents used to clean clothes or dishes, whereas liquid wastes contain detergents from industrial or commercial cleansers. The nearly universal presence of detergents in illicit discharges, combined with their absence in natural waters or tap water, makes them an excellent indicator. Research has revealed three indicator parameters that measure the level of detergent or its components-- surfactants, fluorescence, and surface tension (Pitt, IDDE Project Support Material). Surfactants have been the most widely applied and transferable of the three indicators. Fluorescence and surface tension show promise, but only limited field testing has been performed on these more experimental parameters. Methods and laboratory protocols for each of the three detergent indicator parameters are reviewed in Appendix F2.

### *E. coli*, Enterococci and Total Coliform

Each of these bacteria is found at very high concentrations in sewage compared to other flow types, and is a good indicator of sewage or septage discharges, unless pet or wildlife sources exist in the subwatershed. Overall, bacteria are good supplemental indicators and can be used to find “problem” streams or outfalls that exceed public health standards. Relatively simple analytical methods are now available to test for bacteria indicators, although they still suffer from two monitoring constraints. The first is the relatively long analysis time (18-24 hours) to get results, and the second is that the waste produced by the tests may be classified as a biohazard and require special disposal techniques.

### Fluorescence

Laundry detergents are highly fluorescent because optical brighteners are added to the formula to produce “brighter whites.” Optical brighteners are the reason that white clothes appear to have a bluish color when placed under a fluorescent light. Fluorescence is a very sensitive indicator of the presence of detergents in discharges, using a fluorometer to measure fluorescence at specific wavelengths of light. Since no chemicals are needed for testing, fluorometers have minimal safety and waste disposal concerns. Some technical concerns do limit the utility of fluorescence as an indicator of illicit discharges. The concerns include the presence of fluorescence in non-illicit flow types such as irrigation water, the considerable variation of fluorescence between different detergent brands, and the lack of a readily standard or benchmark concentration for

optical brighteners. For example, Pitt (IDDE Project Support Material) measured fluorescence in mg/L of Tide™ brand detergent, and found the degree of fluorescence varied regionally, temporally, and between specific detergent formulations. Given these current limitations, fluorescence is best combined with other detergent indicators such as surfactants. Appendix F3 should be consulted for more detailed information on analytical methods and experimental field testing using fluorescence as an indicator parameter.

### Fluoride

Fluoride is added to drinking water supplies in most communities to improve dental health, and normally found at a concentration of two parts per million in tapwater. Consequently, fluoride is an excellent conservative indicator of tap water discharges or leaks from water supply pipes that end up in the storm drain. Fluoride is obviously not a good indicator in communities that do not fluoridate drinking water, or where individual wells provide drinking water. One key constraint is that the reagent used in the recommended analytical method for fluoride is considered a hazardous waste, and must be disposed of properly.

### Hardness

Hardness measures the positive ions dissolved in water and primarily include magnesium and calcium in natural waters, but are sometimes influenced by other metals. Field testing by Pitt (IDDE Project Support Material) suggests that hardness has limited value as an indicator parameter, except when values are extremely high or low (which may signal the presence of some liquid wastes). Hardness may be applicable in communities where hardness levels are elevated in groundwater due to karst or limestone terrain. In these regions, hardness can help distinguish natural groundwater flows present in outfalls from tap water and other flow types.

### pH

Most discharge flow types are neutral, having a pH value around 7, although groundwater concentrations can be somewhat variable. pH is a reasonably good indicator for liquid wastes from industries, which can have very high or low pH (ranging from 3 to 12). The pH of residential wash water tends to be rather basic (pH of 8 or 9). The pH of a discharge is very simple to monitor in the field with low cost test strips or probes. Although pH data is often not conclusive by itself, it can identify problem outfalls that merit follow-up investigations using more effective indicators.

### Potassium

Potassium is found at relatively high concentrations in sewage, and extremely high concentrations in many industrial process waters. Consequently, potassium can act as a good first screen for industrial wastes, and can also be used in combination with ammonia to distinguish wash waters from sanitary wastes. (See Chapter 12). Simple field probes can detect potassium at relatively high concentrations (5 mg/L), whereas more complex colorimetric tests are needed to detect potassium concentrations lower than 5 mg/L.

### Surface Tension

Surfactants remove dirt particles by reducing the surface tension of the bubbles formed in laundry water when it is agitated. Reduced surface tension makes dirt particles less likely to settle on a solid surface (e.g., clothes or dishes) and become suspended instead on the water's surface. The visible manifestation of reduced surface tension is the formation of foam or bubbles on the water surface. Pitt (IDDE Project Support Material) tested a very simple procedure to

measure surface tension that quantifies the formation of foam and bubbles in sample bottles. Initial laboratory tests suggest that surface tension is a good indicator of surfactants, but only when they are present at relatively high concentrations. Section F3 provides a more detailed description of the surface tension measurement procedure.

### Surfactants

Surfactants are the active ingredient in most commercial detergents, and are typically measured as Methyl Blue Active Substances (or MBAS). They are a synthetic replacement for soap, which builds up deposits on clothing over time. Since surfactants are not found in nature, but are always present in detergents, they are excellent indicators of sewage and wash waters. The presence of surfactants in cleansers, emulsifiers and lubricants also makes them an excellent indicator of industrial or commercial liquid wastes. In fact, research by Pitt (IDDE Project Support Material) found that detergents were an excellent indicator of “contaminated” discharges in Alabama (i.e., discharges that were not tap water or groundwater). Several analytical methods are available to monitor surfactants. Unfortunately, the reagents used involve toluene, chloroform, or benzene, each of which is considered hazardous waste with a potential human health risk. The most common analysis method uses chloroform as a reagent, and is recommended because it is relatively safer when compared to other reagents.

### Turbidity

Turbidity is a quantitative measure of cloudiness in water, and is normally measured with a simple field probe. While turbidity itself cannot always distinguish between contaminated flow types, it is a potentially useful screening indicator to determine if the discharge is contaminated (i.e., not composed of tap water or groundwater).

**Table 39: Indicator Parameters Used to Detect Illicit Discharges**

Parameter	Discharge Types It Can Detect				Laboratory/Analytical Challenges
	Sewage	Washwater	Tap Water	Industrial or Commercial Liquid Wastes	
Ammonia	●	⊙	○	⊙	Can change into other nitrogen forms as the flow travels to the outfall
Boron	⊙	⊙	○	N/A	
Chlorine	○	○	○	⊙	High chlorine demand in natural waters limits utility to flows with very high chlorine concentrations
Color	⊙	⊙	○	⊙	
Conductivity	⊙	⊙	○	⊙	Ineffective in saline waters
Detergents – Surfactants	●	●	○	⊙	Reagent is a hazardous waste
<i>E. coli</i> Enterococci Total Coliform	⊙	○	○	○	24-hour wait for results Need to modify standard monitoring protocols to measure high bacteria concentrations
Fluoride*	○	○	●	⊙	Reagent is a hazardous waste Exception for communities that do not fluoridate their tap water
Hardness	⊙	⊙	⊙	⊙	
pH	○	⊙	○	⊙	
Potassium	⊙	○	○	●	May need to use two separate analytical techniques, depending on the concentration
Turbidity	⊙	⊙	○	⊙	

● Can almost always (>80% of samples) distinguish this discharge from clean flow types (e.g., tap water or natural water). For tap water, can distinguish from natural water.  
 ⊙ Can sometimes (>50% of samples) distinguish this discharge from clean flow types depending on regional characteristics, or can be helpful in combination with another parameter  
 ○ Poor indicator. Cannot reliably detect illicit discharges, or cannot detect tap water  
 N/A: Data are not available to assess the utility of this parameter for this purpose.  
 Data sources: Pitt (this study)  
 \*Fluoride is a poor indicator when used as a single parameter, but when combined with additional parameters (such as detergents, ammonia and potassium), it can almost always distinguish between sewage and washwater.



# Appendix 2

**Appendix 2**  
**KCRC Outfalls and Discharge Points**  
**February 2015**

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
GNT 0905	Trib to Buck Creek	42.839403	85.622662	Medium High	Outfall	Trib to Buck Creek
GNT 0906	Trib to Buck Creek	42.840799	85.619703	Medium High	Outfall	Trib to Buck Creek
GNT 0907	Unnamed Pond	42.840341	85.619707	Medium High	Outfall	Unnamed Pond
GNT 0908	Unnamed Pond	42.839992	85.616783	Medium High	Outfall	Unnamed Pond
GNT 0909	Unnamed Pond	42.827077	85.619912	Medium High	Outfall	Unnamed Pond
BYT 1401	Trib to Buck Creek	42.810079	85.688688	Medium High	Outfall	Trib to Buck Creek
BYT 0907	Trib to Buck Creek	42.829609	85.729589	Medium High	Outfall	Trib to Buck Creek
BYT 0908	Trib to Buck Creek	42.828059	85.729935	Medium High	Outfall	Trib to Buck Creek
BYT 0909	Wetland Pond	42.827008	85.739717	Medium High	Outfall	Wetland Pond
PT 3501	Wetland Pond	43.036913	85.586792	Medium High	Outfall	Wetland Pond
PT 0501	Freska Lake	43.11523	85.64174	Medium High	Outfall	Freska Lake
KCRC DP1	MS4: Wyoming	42.855196	85.683635	Medium Low	Discharge Point	Buck Creek
KCRC DP2	MS4:Kentwood/Wyoming	42.854936	85.663788	Medium Low	Discharge Point	Pine Hill Creek
KCRC DP3	MS4:Kentwood	42.854811	85.643115	Medium Low	Discharge Point	Pine Hill Creek
KCRC DP4	MS4:Kentwood	42.855357	85.644285	Medium Low	Discharge Point	Pine Hill Creek
KCRC DP5	MS4:Kentwood	42.854832	85.646588	Medium Low	Discharge Point	Pine Hill Creek
KCRC DP6	MS4:Kentwood	42.879168	85.546929	Medium Low	Discharge Point	Trib. Burger Drain
KCRC DP7	MS4:Kentwood	42.892126	85.547628	Medium Low	Discharge Point	Trib. Burger Drain
KCRC DP8	MS4:Kentwood	42.913101	85.548991	Medium Low	Discharge Point	Little Plaster Creek
KCRC DP9	MS4:Kentwood	42.941036	85.55572	Medium Low	Discharge Point	Unnamed Stream
KCRC DP10	Walker	43.029117	85.691711	Medium Low	Discharge Point	Trib. York Creek
ADT 0705	Egypt Creek	43.006660	-85.532690	Medium High	Outfall	Egypt Creek
ADT 2704	Honey Creek	42.903000	-85.485390	Medium High	Outfall	Honey Creek
ADT 2705	Grand River	42.958610	-85.477390	Medium High	Outfall	Grand River
ADT 2706	Grand River	42.957880	-85.476680	Medium High	Outfall	Grand River
ADT 2805	Grand River Trib.	42.957230	-85.506230	Medium High	Outfall	Grand River Trib.
ADT 2806	Detention Pond	42.957720	-85.509190	Medium High	Outfall	Detention Pond
ADT 2905	Detention Area	42.962590	-85.527250	Medium High	Outfall	Detention Area
ADT 2907	Carl Creek	42.961220	-85.526570	Medium High	Outfall	Carl Creek
ADT 2911	Detention Pond	42.958560	-85.516900	Medium High	Outfall	Detention Pond
ADT 3001	Unnamed Pond	42.958560	-85.540070	Medium High	Outfall	Unnamed Pond
ADT 3002	Unnamed Pond	42.958050	-85.540110	Medium High	Outfall	Unnamed Pond
ADT 3101	Detention Pond	42.955310	-85.531260	Medium High	Outfall	Detention Pond
ADT 3105	Second Drain	42.946160	-85.539000	Medium High	Outfall	Second Drain

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
ADT 3205	Grand River Trib.	42.950890	-85.511890	Medium High	Outfall	Grand River Trib.
ADT 3207	Grand River Trib.	42.949510	-85.513490	Medium High	Outfall	Grand River Trib.
ADT 3208	Paradise Lake	42.947250	-85.526760	Medium High	Outfall	Paradise Lake
ADT 3301	Grand River Trib.	42.955390	-85.508860	Medium High	Outfall	Grand River Trib.
ADT 3303	Thornapple River	42.944250	-85.493250	Medium High	Outfall	Thornapple River
ADT 3304	Thornapple River	42.945610	-85.490810	Medium High	Outfall	Thornapple River
ADT 3401	Grand River Trib.	42.957070	-85.472210	Medium High	Outfall	Grand River Trib.
ADT 3403	Grand River	42.957570	-85.476490	Medium High	Outfall	Grand River
ADT 3404	Grand River	42.957340	-85.476330	Medium High	Outfall	Grand River
ADT 3405	Thornapple River	42.953480	-85.486020	Medium High	Outfall	Thornapple River
ADT 3406	Thornapple River	42.953110	-85.485220	Medium High	Outfall	Thornapple River
ADT 3411	Thornapple River	42.945630	-85.489670	Medium High	Outfall	Thornapple River
ADT 3412	Thornapple River	42.945740	-85.488180	Medium High	Outfall	Thornapple River
ADT 3413	Thornapple River	42.946110	-85.486770	Medium High	Outfall	Thornapple River
AGT 1303	Stegman Creek	43.160560	-85.571610	Medium High	Outfall	Stegman Creek
APT 1202	Unnamed Pond	43.100450	-85.690000	Medium High	Outfall	Unnamed Pond
APT 1301	Mill Creek	43.086620	-85.687950	Medium High	Outfall	Mill Creek
APT 1302	Mill Creek	43.084690	-85.685190	Medium High	Outfall	Mill Creek
APT 1303	Mill Creek	43.082870	-85.684880	Medium High	Outfall	Mill Creek
APT 1304	Mill Creek	43.082040	-85.685580	Medium High	Outfall	Mill Creek
APT 1305	Mill Creek	43.081810	-85.686320	Medium High	Outfall	Mill Creek
APT 1307	Mill Creek	43.080350	-85.688200	Medium High	Outfall	Mill Creek
APT 2503	Strawberry Creek	43.053590	-85.683860	Medium High	Outfall	Strawberry Creek
APT 2505	Strawberry Creek	43.051400	-85.678540	Medium High	Outfall	Strawberry Creek
APT 2506	Strawberry Creek	43.050510	-85.677150	Medium High	Outfall	Strawberry Creek
APT 2510	Strawberry Creek	43.048510	-85.673740	Medium High	Outfall	Strawberry Creek
APT 3502	Unnamed Pond	43.030510	-85.697100	Medium High	Outfall	Unnamed Pond
APT 3601	Mill Creek	43.039680	-85.671040	Medium High	Outfall	Mill Creek
APT 3606	York Creek	43.036600	-85.681410	Medium High	Outfall	York Creek
APT 3609	Alpine/Walker Drain	43.034110	-85.676610	Medium High	Outfall	Alpine/Walker Drain
APT 3610	York Creek	43.034310	-85.675700	Medium High	Outfall	York Creek
APT 3611	York Creek	43.034160	-85.674840	Medium High	Outfall	York Creek
APT 3613	York Creek	43.034040	-85.673610	Medium High	Outfall	York Creek
APT 3614	York Creek	43.033480	-85.672260	Medium High	Outfall	York Creek
APT 3615	York Creek	43.033240	-85.671480	Medium High	Outfall	York Creek
APT 3616	York Creek	43.032850	-85.670300	Medium High	Outfall	York Creek
APT 3617	York Creek	43.032830	-85.670230	Medium High	Outfall	York Creek
BYT 0109	Buck Creek	42.810990	-85.672660	Medium High	Outfall	Buck Creek
BYT 0110	Unnamed Creek	42.845170	-85.674150	Medium High	Outfall	Unnamed Creek

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
BYT 0111	Unnamed Creek	42.843730	-85.674350	Medium High	Outfall	Unnamed Creek
BYT 0112	Unnamed Creek	42.845440	-85.666940	Medium High	Outfall	Unnamed Creek
BYT 0113	Unnamed Creek	42.845420	-85.663900	Medium High	Outfall	Unnamed Creek
BYT 0201	Unnamed Creek	42.845630	-85.692310	Medium High	Outfall	Unnamed Creek
BYT 0204	Unnamed Pond	42.841270	-85.684370	Medium High	Outfall	Unnamed Pond
BYT 0205	Unnamed Pond	42.841170	-85.689160	Medium High	Outfall	Unnamed Pond
BYT 0901	Rush Creek	42.838661	-85.735537	Medium High	Outfall	Rush Creek
BYT 0905	Unnamed Pond	42.836920	-85.723600	Medium High	Outfall	Unnamed Pond
BYT 1004	Rush Creek	42.830739	-85.722877	Medium High	Outfall	Rush Creek
BYT 1005	Rush Creek	42.830669	-85.722299	Medium High	Outfall	Rush Creek
BYT 1213	Buck Creek	42.831150	-85.667020	Medium High	Outfall	Buck Creek
BYT 1214	Buck Creek	42.829260	-85.666920	Medium High	Outfall	Buck Creek
BYT 1219	Buck Creek	42.835090	-85.677150	Medium High	Outfall	Buck Creek
BYT 1224	Buck Creek	42.827041	-85.663802	Medium High	Outfall	Buck Creek
BYT 1302	Unnamed Pond	42.824080	-85.669863	Medium High	Outfall	Unnamed Pond
BYT 1305	Buck Creek	42.822811	-85.683283	Medium High	Outfall	Buck Creek
BYT 1308	Unnamed Pond	42.816171	-85.677811	Medium High	Outfall	Unnamed Pond
BYT 1309	Unnamed Pond	42.816490	-85.674190	Medium High	Outfall	Unnamed Pond
BYT 1310	Unnamed Pond	42.814579	-85.663274	Medium High	Outfall	Unnamed Pond
BYT 1311	Unnamed River	42.812420	-85.676036	Medium High	Outfall	Unnamed River
BYT 1312	Unnamed Creek	42.812620	-85.677922	Medium High	Outfall	Unnamed Creek
BYT 1313	Unnamed Creek	42.812140	-85.680710	Medium High	Outfall	Unnamed Creek
BYT 1314	Unnamed Creek	42.812950	-85.683240	Medium High	Outfall	Unnamed Creek
BYT 1602	Unnamed Pond	42.821948	-85.733816	Medium High	Outfall	Unnamed Pond
BYT 1603	Unnamed Pond	42.819270	-85.726390	Medium High	Outfall	Unnamed Pond
BYT 2102	Unnamed Pond	42.808199	-85.727388	Medium High	Outfall	Unnamed Pond
BYT 2104	Unnamed Pond	42.808567	-85.732136	Medium High	Outfall	Unnamed Pond
BYT 2207	Ditch	42.806326	-85.713349	Medium High	Outfall	Ditch
CLT 0308	Listening Valley #2 Drain	42.942760	-85.469690	Medium High	Outfall	Listening Valley #2 Drain
CLT 1003	Thornapple River	42.840180	-85.477600	Medium High	Outfall	Thornapple River
CLT 1102	Campau Lake	42.836160	-85.450180	Medium High	Outfall	Campau Lake
CLT 1103	Kettle Lake	42.834370	-85.450470	Medium High	Outfall	Kettle Lake
CLT 1106A	Kettle Lake	42.830640	-85.449600	Medium High	Outfall	Kettle Lake
CLT 1107	Unnamed Wetland	42.835180	-85.455150	Medium High	Outfall	Unnamed Wetland
CLT 1203	Campau Lake	42.840090	-85.445810	Medium High	Outfall	Campau Lake
CLT 1206	Enchantment Acres Drain	42.838390	-85.438260	Medium High	Outfall	Enchantment Acres Drain
CNT 0701	Barkley Creek	43.092490	-85.529720	Medium High	Outfall	Barkley Creek
CNT 0801	Lake Bella Vista	43.095470	-85.512050	Medium High	Outfall	Lake Bella Vista
CNT 0803	Lake Bella Vista	43.093340	-85.515080	Medium High	Outfall	Lake Bella Vista

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
CNT 0804	Lake Bella Vista	43.091790	-85.517170	Medium High	Outfall	Lake Bella Vista
CNT 0806	Lake Bella Vista	43.090650	-85.519450	Medium High	Outfall	Lake Bella Vista
CNT 0807	Lake Bella Vista	43.088440	-85.521480	Medium High	Outfall	Lake Bella Vista
CNT 0809	Lake Bella Vista	43.091390	-85.524730	Medium High	Outfall	Lake Bella Vista
CNT 0810	Lake Bella Vista	43.092260	-85.525260	Medium High	Outfall	Lake Bella Vista
CNT 0811	Lake Bella Vista	43.093900	-85.522870	Medium High	Outfall	Lake Bella Vista
CNT 0812	Lake Bella Vista	43.094090	-85.524730	Medium High	Outfall	Lake Bella Vista
CNT 0813	Lake Bella Vista	43.095490	-85.524440	Medium High	Outfall	Lake Bella Vista
CNT 0814	Lake Bella Vista	43.094950	-85.526360	Medium High	Outfall	Lake Bella Vista
CNT 0815	Lake Bella Vista	43.089390	-85.527690	Medium High	Outfall	Lake Bella Vista
CNT 0816	Lake Bella Vista	43.088090	-85.526800	Medium High	Outfall	Lake Bella Vista
CNT 0817	Lake Bella Vista	43.088200	-85.525700	Medium High	Outfall	Lake Bella Vista
CNT 0819	Lake Bella Vista	43.087170	-85.521040	Medium High	Outfall	Lake Bella Vista
CNT 0820	Lake Bella Vista	43.087410	-85.520900	Medium High	Outfall	Lake Bella Vista
CNT 0823	Lake Bella Vista	43.087380	-85.512960	Medium High	Outfall	Lake Bella Vista
CNT 0824	Lake Bella Vista	43.088340	-85.511340	Medium High	Outfall	Lake Bella Vista
CNT 0825	Lake Bella Vista	43.089540	-85.512290	Medium High	Outfall	Lake Bella Vista
CNT 0826	Lake Bella Vista	43.090540	-85.512050	Medium High	Outfall	Lake Bella Vista
CNT 0827	Unnamed Pond	43.097200	-85.517020	Medium High	Outfall	Unnamed Pond
CNT 0828	Unnamed Lake	43.096760	-85.518770	Medium High	Outfall	Unnamed Lake
CNT 0829	Unnamed Lake	43.094340	-85.520970	Medium High	Outfall	Unnamed Lake
CNT 0830	Unnamed Lake	43.094800	-85.518070	Medium High	Outfall	Unnamed Lake
CNT 0906	Lake Bella Vista	43.095760	-85.509180	Medium High	Outfall	Lake Bella Vista
CNT 0909	Lake Bella Vista	43.091930	-85.504740	Medium High	Outfall	Lake Bella Vista
CNT 0911	Detention Area	43.090930	-85.500430	Medium High	Outfall	Detention Area
CNT 0912	Lake Bella Vista	43.090930	-85.509190	Medium High	Outfall	Lake Bella Vista
CNT 0913	Lake Bella Vista	43.090190	-85.508090	Medium High	Outfall	Lake Bella Vista
CNT 1001	Detention Area	43.093590	-85.470330	Medium High	Outfall	Detention Area
CNT 1101	Unnamed Creek	43.090770	-85.450550	Medium High	Outfall	Unnamed Creek
CNT 1102	Lake View County Drain	43.098410	-85.454770	Medium High	Outfall	Lake View County Drain
CNT 1106	Detention Area	43.091480	-85.451770	Medium High	Outfall	Detention Area
CNT 1107	Detention Area	43.090770	-85.450550	Medium High	Outfall	Detention Area
CNT 1401	Bostwick Lake	43.085490	-85.453870	Medium High	Outfall	Bostwick Lake
CNT 1402	Bostwick Lake	43.084340	-85.456210	Medium High	Outfall	Bostwick Lake
CST 0203	Unnamed Creek	42.933410	-85.466930	Medium High	Outfall	Unnamed Creek
CST 0204	Unnamed Creek	42.931040	-85.470490	Medium High	Outfall	Unnamed Creek
CST 0302	Thornapple River	42.937270	-85.491100	Medium High	Outfall	Thornapple River
CST 0303	Thornapple River	42.934420	-85.487040	Medium High	Outfall	Thornapple River
CST 0305	Thornapple River	42.931590	-85.484960	Medium High	Outfall	Thornapple River

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
CST 0401	Thornapple River	42.940960	-85.496780	Medium High	Outfall	Thornapple River
CST 0402	Thornapple River	42.939130	-85.494270	Medium High	Outfall	Thornapple River
CST 0403	Thornapple River	42.938400	-85.492760	Medium High	Outfall	Thornapple River
CST 0404A	Detention Area	42.938200	-85.500980	Medium High	Outfall	Detention Area
CST 0404B	Detention Area	42.938200	-85.500980	Medium High	Outfall	Detention Area
CST 0505	Walden Lake	42.929060	-85.522710	Medium High	Outfall	Walden Lake
CST 0506	Detention Area	42.930740	-85.579160	Medium High	Outfall	Detention Area
CST 0507	Unnamed Pond	42.932590	-85.513820	Medium High	Outfall	Unnamed Pond
CST 0510	Detention Area	42.929030	-85.518020	Medium High	Outfall	Detention Area
CST 0601	Unnamed Pond	42.939030	-85.540020	Medium High	Outfall	Unnamed Pond
CST 0604	Detention Area	42.939960	-85.550230	Medium High	Outfall	Detention Area
CST 0606	Undetermined Drain	42.927460	-85.539380	Medium High	Outfall	Undetermined Drain
CST 0701	Detention Area	42.927280	-85.542460	Medium High	Outfall	Detention Area
CST 0801	Detention Pond	42.921300	-85.514910	Medium High	Outfall	Detention Pond
CST 0802	Foremost Drain/Detention Pond	42.920140	-85.510450	Medium High	Outfall	Foremost Drain/Detention Pond
CST 0901	Schoolhouse Creek	42.918210	-85.493910	Medium High	Outfall	Schoolhouse Creek
CST 0902	Schoolhouse Creek	42.918780	-85.494120	Medium High	Outfall	Schoolhouse Creek
CST 0903	Schoolhouse Creek	42.919030	-85.496270	Medium High	Outfall	Schoolhouse Creek
CST 0904	Schoolhouse Creek	42.918680	-85.497390	Medium High	Outfall	Schoolhouse Creek
CST 0907	Thornapple River	42.914370	-85.492030	Medium High	Outfall	Thornapple River
CST 0908	Thornapple River	42.913680	-85.494270	Medium High	Outfall	Thornapple River
CST 1002	Unnamed River	42.921670	-85.484840	Medium High	Outfall	Unnamed River
CST 1003	Unnamed River	42.918730	-85.481610	Medium High	Outfall	Unnamed River
CST 1007	Thornapple River	42.919800	-85.487440	Medium High	Outfall	Thornapple River
CST 1010	Thornapple River	42.918190	-85.490360	Medium High	Outfall	Thornapple River
CST 1011	Unnamed River	42.913930	-85.486340	Medium High	Outfall	Unnamed River
CST 1501	Detention Area	42.909460	-85.480680	Medium High	Outfall	Detention Area
CST 1502	Detention Area	42.908000	-85.479900	Medium High	Outfall	Detention Area
CST 1504	Detention Area	42.907210	-85.474670	Medium High	Outfall	Detention Area
CST 1505	Detention Area	42.907310	-85.472500	Medium High	Outfall	Detention Area
CST 1506	Unnamed Pond	42.903090	-85.469950	Medium High	Outfall	Unnamed Pond
CST 1507	Detention Pond	42.902830	-85.470860	Medium High	Outfall	Detention Pond
CST 1508	Unnamed River/Apple Hills Drain	42.903740	-85.472600	Medium High	Outfall	Unnamed River/Apple Hills Drain
CST 1509	Detention Pond	42.902690	-85.479190	Medium High	Outfall	Detention Pond
CST 1510	Unnamed River	42.902100	-85.480130	Medium High	Outfall	Unnamed River
CST 1511	Apple Hills Drain	42.901790	-85.482240	Medium High	Outfall	Apple Hills Drain
CST 1512A	Apple Hills Drain	42.900540	-85.482090	Medium High	Outfall	Apple Hills Drain
CST 1512B	Apple Hills Drain	42.900760	-85.483150	Medium High	Outfall	Apple Hills Drain
CST 1513	Apple Hills Drain	42.901130	-85.483330	Medium High	Outfall	Apple Hills Drain

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
CST 1601	Thornapple River	42.911570	-85.497000	Medium High	Outfall	Thornapple River
CST 1603	Thornapple River	42.910420	-85.498290	Medium High	Outfall	Thornapple River
CST 1606	Detention Pond	42.912380	-85.504144	Medium High	Outfall	Detention Pond
CST 1608	Thornapple River	42.902990	-85.498340	Medium High	Outfall	Thornapple River
CST 1609	Unnamed River	42.901680	-85.562040	Medium High	Outfall	Unnamed River
CST 1610	Unnamed River	42.900990	-85.503400	Medium High	Outfall	Unnamed River
CST 1611	Unnamed River	42.899960	-85.506610	Medium High	Outfall	Unnamed River
CST 1612	Unnamed River	42.900140	-85.507800	Medium High	Outfall	Unnamed River
CST 1613	Unnamed River	42.900610	-85.509370	Medium High	Outfall	Unnamed River
CST 1706	Unnamed River	42.909930	-85.511690	Medium High	Outfall	Unnamed River
CST 1708	Detention Area	42.904430	-85.513430	Medium High	Outfall	Detention Area
CST 1709	Detention Pond	42.904160	-85.518170	Medium High	Outfall	Detention Pond
CST 1710	Detention Area	42.901880	-85.528990	Medium High	Outfall	Detention Area
CST 1711	Unnamed River	42.902040	-85.524980	Medium High	Outfall	Unnamed River
CST 1804	Detention Pond	42.903020	-85.539910	Medium High	Outfall	Detention Pond
CST 1805	Detention Area	42.904950	-85.536350	Medium High	Outfall	Detention Area
CST 1806	Wetland	42.903290	-85.533650	Medium High	Outfall	Wetland
CST 1901	Unnamed Pond	42.897730	-85.546710	Medium High	Outfall	Unnamed Pond
CST 1902	Unnamed Pond	42.897740	-85.547600	Medium High	Outfall	Unnamed Pond
CST 1903	Unnamed River	42.897210	-85.547550	Medium High	Outfall	Unnamed River
CST 2001	Detention Area	42.897320	-85.528950	Medium High	Outfall	Detention Area
CST 2101	Thornapple River	42.897880	-85.489670	Medium High	Outfall	Thornapple River
CST 2102	Unnamed River	42.896340	-85.492660	Medium High	Outfall	Unnamed River
CST 2103	Unnamed River	42.895420	-85.493930	Medium High	Outfall	Unnamed River
CST 2202	Unnamed River	42.895310	-85.479630	Medium High	Outfall	Unnamed River
CST 2203	Unnamed River	42.895130	-85.479640	Medium High	Outfall	Unnamed River
CST 2204	Unnamed River	42.894420	-85.480640	Medium High	Outfall	Unnamed River
CST 2206	Thornapple River	42.896830	-85.489060	Medium High	Outfall	Thornapple River
CST 2207	Thornapple River	42.891240	-85.486370	Medium High	Outfall	Thornapple River
CST 2209	Detention Pond	42.891040	-85.481900	Medium High	Outfall	Detention Pond
CST 2210	Detention Pond	42.890910	-85.481270	Medium High	Outfall	Detention Pond
CST 2211	Detention Pond	42.890500	-85.481850	Medium High	Outfall	Detention Pond
CST 3003	Unnamed River	42.871430	-85.544970	Medium High	Outfall	Unnamed River
CST 3405	Unnamed River	42.861010	-85.468670	Medium High	Outfall	Unnamed River
CST 3407	Unnamed River	42.856530	-85.483700	Medium High	Outfall	Unnamed River
CST 3408	Unnamed River	42.856350	-85.485750	Medium High	Outfall	Unnamed River
CRT 2702	Little Myers Lake	43.139881	-85.488929	Medium High	Outfall	Little Myers Lake
CRT 2705	Myers Lake	43.134720	-85.486610	Medium High	Outfall	Myers Lake
CRT 3403	Little Brower Lake	43.130210	-85.486560	Medium High	Outfall	Little Brower Lake

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
CRT 3408	Brower Lake	43.127700	-85.478100	Medium High	Outfall	Brower Lake
CRT 3409	Brower Lake	43.121080	-85.484540	Medium High	Outfall	Brower Lake
GNT 0206	Dutton Drain	42.840990	-85.581380	Medium High	Outfall	Dutton Drain
GNT 0207	Tributary to Plaster Creek	42.842860	-85.565330	Medium High	Outfall	Tributary to Plaster Creek
GNT 0301	Plaster Creek	42.854380	-85.589950	Medium High	Outfall	Plaster Creek
GNT 0302	Plaster Creek	42.845770	-85.594720	Medium High	Outfall	Plaster Creek
GNT 0302A	Plaster Creek	42.844490	-85.594680	Medium High	Outfall	Plaster Creek
GNT 0309	Dutton Drain	42.842130	-85.585310	Medium High	Outfall	Dutton Drain
GNT 0309A	Dutton Drain	42.842190	-85.585300	Medium High	Outfall	Dutton Drain
GNT 0403	The Crossings Drain	42.847060	-85.608960	Medium High	Outfall	The Crossings Drain
GNT 0404	The Crossings Drain	42.846980	-85.609350	Medium High	Outfall	The Crossings Drain
GNT 0406	The Crossings Drain/Plaster Creek	42.843150	-85.611150	Medium High	Outfall	The Crossings Drain/Plaster Creek
GNT 0409	Unnamed Wetland	42.844620	-85.619170	Medium High	Outfall	Unnamed Wetland
GNT 0503	Waterman Drain	42.853350	-85.637030	Medium High	Outfall	Waterman Drain
GNT 0510	Cuttlerville Drain	42.951080	-85.511820	Medium High	Outfall	Cuttlerville Drain
GNT 0603	VanOoster Drain	42.847410	-85.654660	Medium High	Outfall	VanOoster Drain
GNT 0606	VanOoster Drain	42.847440	-85.655140	Medium High	Outfall	VanOoster Drain
GNT 0607	Cuttlerville Drain	42.842010	-85.644660	Medium High	Outfall	Cuttlerville Drain
GNT 0607A	Cuttlerville Drain	42.841960	-85.644660	Medium High	Outfall	Cuttlerville Drain
GNT 0609	Cuttlerville Drain	42.841790	-85.651410	Medium High	Outfall	Cuttlerville Drain
GNT 0610	Cuttlerville Drain	42.841900	-85.654370	Medium High	Outfall	Cuttlerville Drain
GNT 0614	Cuttlerville Drain	42.841900	-85.654370	Medium High	Outfall	Cuttlerville Drain
GNT 0711	Unnamed Wetland	42.827930	-85.646260	Medium High	Outfall	Unnamed Wetland
GNT 0716	Byron/Gaines Buck Creek Ext	42.830890	-85.649080	Medium High	Outfall	Byron/Gaines Buck Creek Ext
GNT 0717	Byron/Gaines Buck Creek Ext	42.830590	-85.644620	Medium High	Outfall	Byron/Gaines Buck Creek Ext
GNT 0717A	Byron/Gaines Buck Creek Ext	42.830740	-85.644610	Medium High	Outfall	Byron/Gaines Buck Creek Ext
GNT 0803	Unnamed Creek	42.832840	-85.631240	Medium High	Outfall	Unnamed Creek
GNT 0808	Wetland	42.826100	-85.655610	Medium High	Outfall	Wetland
GNT 0809	Wetland Pond	42.830360	-85.635590	Medium High	Outfall	Wetland Pond
GNT 0812	Golf Course Pond	42.829560	-85.628970	Medium High	Outfall	Golf Course Pond
GNT 0813	Golf Course Pond	42.828620	-85.631290	Medium High	Outfall	Golf Course Pond
GNT 0815	Unnamed Creek	42.826760	-85.642330	Medium High	Outfall	Unnamed Creek
GNT 0816	Unnamed Creek	42.827160	-85.641170	Medium High	Outfall	Unnamed Creek
GNT 0901	Unnamed Wetland	42.840920	-85.621350	Medium High	Outfall	Unnamed Wetland
GNT 0902	Wetland Pond	42.833300	-85.621580	Medium High	Outfall	Wetland Pond
GNT 0904	Unnamed Wetland	42.833590	-85.622370	Medium High	Outfall	Unnamed Wetland
GNT 1703	Shard Creek	42.811670	-85.641100	Medium High	Outfall	Shard Creek
GNT 1802	Unnamed Creek	42.823040	-85.650880	Medium High	Outfall	Unnamed Creek
GNT 1803	Unnamed Creek	42.824090	-85.652500	Medium High	Outfall	Unnamed Creek



<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
GRT 0302	Unnamed Pond	43.005090	-85.582540	Medium High	Outfall	Unnamed Pond
GRT 0303	Detention Area	43.025960	-85.609090	Medium High	Outfall	Detention Area
GRT 0304	Detention Area	43.022660	-85.601880	Medium High	Outfall	Detention Area
GRT 0305	Unnamed Pond	43.022210	-85.599890	Medium High	Outfall	Unnamed Pond
GRT 0306	Perch Lake	43.022030	-85.606280	Medium High	Outfall	Perch Lake
GRT 0307	Perch Lake	43.020560	-85.605790	Medium High	Outfall	Perch Lake
GRT 0401	Dean Lake	43.027580	-85.614560	Medium High	Outfall	Dean Lake
GRT 0401A	Dean Lake	43.025520	-85.610890	Medium High	Outfall	Dean Lake
GRT 0408	Emerald Lake	43.018590	-85.553810	Medium High	Outfall	Emerald Lake
GRT 1001	Unnamed Pond	43.007560	-85.596010	Medium High	Outfall	Unnamed Pond
GRT 1002	Unnamed Pond	43.006850	-85.596890	Medium High	Outfall	Unnamed Pond
GRT 1004	Detention Area	43.008230	-85.603260	Medium High	Outfall	Detention Area
GRT 1005A	Detention Area	43.009350	-85.605740	Medium High	Outfall	Detention Area
GRT 1005B	Detention Pond	43.009450	-85.605100	Medium High	Outfall	Detention Pond
GRT 1006	Detention Area	43.012070	-85.604790	Medium High	Outfall	Detention Area
GRT 2502	Detention Area	42.967650	-85.556680	Medium High	Outfall	Detention Area
GRT 2503	Detention Area	42.966640	-85.555500	Medium High	Outfall	Detention Area
GRT 2504	Unnamed Pond	42.965360	-85.557730	Medium High	Outfall	Unnamed Pond
GRT 2505	Unnamed Pond	42.964480	-85.558580	Medium High	Outfall	Unnamed Pond
GRT 2511	Unnamed Pond	42.960780	-85.558150	Medium High	Outfall	Unnamed Pond
GRT 2512	Detention Area	42.958690	-85.560810	Medium High	Outfall	Detention Area
GRT 2513	Echo Lake	42.958830	-85.565650	Medium High	Outfall	Echo Lake
GRT 2514	Echo Lake	42.958510	-85.566120	Medium High	Outfall	Echo Lake
GRT 2515	Echo Lake/County Drain	42.957570	-85.566890	Medium High	Outfall	Echo Lake/County Drain
GRT 2601	Little Plaster Creek	42.965650	-85.572430	Medium High	Outfall	Little Plaster Creek
GRT 2602	Detention Area	42.964440	-85.572740	Medium High	Outfall	Detention Area
GRT 2603	Detention Area	42.963860	-85.574130	Medium High	Outfall	Detention Area
GRT 2604	Detention Area	42.963170	-85.573440	Medium High	Outfall	Detention Area
GRT 2605	Detention Area	42.962610	-85.573010	Medium High	Outfall	Detention Area
GRT 2610	Hidden Lake	42.965260	-85.589210	Medium High	Outfall	Hidden Lake
GRT 2612	Stoneridge Drain	42.959680	-85.587040	Medium High	Outfall	Stoneridge Drain
GRT 3501	Detention Area	42.955030	-85.570180	Medium High	Outfall	Detention Area
GRT 3504	Detention Pond	42.949020	-85.588200	Medium High	Outfall	Detention Pond
GRT 3601	Echo Lake Drain/Unnamed Creek	42.953760	-85.564480	Medium High	Outfall	Echo Lake Drain/Unnamed Creek
GRT 3602	Echo Lake Drain/Unnamed Creek	42.949900	-85.559300	Medium High	Outfall	Echo Lake Drain/Unnamed Creek
GRT 3603	Echo Lake Drain/Unnamed Creek	42.944690	-85.559940	Medium High	Outfall	Echo Lake Drain/Unnamed Creek
GRT 3604	Echo Lake Drain/Unnamed Creek	42.944830	-85.560660	Medium High	Outfall	Echo Lake Drain/Unnamed Creek
GRT 3606	Echo Lake Drain/Unnamed Creek	42.957660	-85.565070	Medium High	Outfall	Echo Lake Drain/Unnamed Creek
GRT 3607	Echo Lake Drain/Unnamed Creek	42.954610	-85.566510	Medium High	Outfall	Echo Lake Drain/Unnamed Creek

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
JKC 0401	Lamberton Lake	43.022939	-85.629410	Medium High	Outfall	Lamberton Lake
JKC 1201	Martin & Beak Lower Drain	42.915840	-85.549730	Medium High	Outfall	Martin & Beak Lower Drain
JKC 1202	Plaster Creek	42.920340	-85.549410	Medium High	Outfall	Plaster Creek
JKC 1301	Tributary to Little Plaster Creek	42.900490	-85.548320	Medium High	Outfall	Tributary to Little Plaster Creek
JKC 1302	Unnamed Wetland/Plaster Creek	42.904300	-85.548630	Medium High	Outfall	Unnamed Wetland/Plaster Creek
JKC 1303	Plaster Creek	42.905720	-85.548760	Medium High	Outfall	Plaster Creek
JKC 1304	Plaster Creek	42.907910	-85.548840	Medium High	Outfall	Plaster Creek
JKC 2401	Plaster Creek	42.886010	-85.547450	Medium High	Outfall	Plaster Creek
JKC 2402	Plaster Creek	42.897040	-85.548150	Medium High	Outfall	Plaster Creek
JKC 2403	Plaster Creek	42.897080	-85.548150	Medium High	Outfall	Plaster Creek
JKC 3301	Crippen Drain	42.854760	-85.621400	Medium High	Outfall	Crippen Drain
JKC 3401	Plaster Creek	42.855540	-85.605080	Medium High	Outfall	Plaster Creek
JKC 3501	Plaster Creek	42.854680	-85.581770	Medium High	Outfall	Plaster Creek
JKC 3601	Tributary to Plaster Creek	42.867080	-85.546490	Medium High	Outfall	Tributary to Plaster Creek
PT 1101	Evergreen Meadows Drain	43.089350	-85.574780	Medium High	Outfall	
PT 1103	Rogue River	43.087210	-85.589450	Medium High	Outfall	Rogue River
PT 1201	Retention Pond	43.091190	-85.570160	Medium High	Outfall	Retention Pond
PT 1401	Rogue River	43.083301	-85.589236	Medium High	Outfall	Rogue River
PT 1501	Trib. Rogue River	43.081880	-85.595720	Medium High	Outfall	Rogue River
PT 1503	Rogue River	43.075800	-85.594620	Medium High	Outfall	Rogue River
PT 1601	Scott Creek	43.072570	-85.626790	Medium High	Outfall	Scott Creek
PT 1701	Scott Creek	43.075210	-85.633110	Medium High	Outfall	Scott Creek
PT 1905	Unnamed Creek	43.071300	-85.666360	Medium High	Outfall	Wetland
PT 1906	Unnamed Creek	43.070840	-85.666420	Medium High	Outfall	Wetland
PT 2002	Wetland	43.069670	-85.633930	Medium High	Outfall	Wetland
PT 2003A	Grand River	43.064100	-85.632700	Medium High	Outfall	Grand River
PT 2003B	Grand River	43.064440	-85.632700	Medium High	Outfall	Grand River
PT 2005	Unnamed Creek/Grand River	43.059473	-85.640263	Medium High	Outfall	Unnamed Creek/Grand River
PT 2101	Grand River	43.062660	-85.609570	Medium High	Outfall	Grand River
PT 2102	Wetland	43.059000	-85.609400	Medium High	Outfall	Wetland
PT 2106	Scott Creek/Grand River	43.066650	-85.626080	Medium High	Outfall	Scott Creek/Grand River
PT 2107	Grand River	43.058770	-85.609830	Medium High	Outfall	Grand River
PT 2202	Wetland			Medium High	Outfall	Wetland
PT 2701	Grand River	43.055596	-85.597759	Medium High	Outfall	Grand River
PT 2702	Grand River	43.058810	-85.599740	Medium High	Outfall	Grand River
PT 2703	Grand River	43.057070	-85.604970	Medium High	Outfall	Grand River
PT 2802	Unnamed Pond	43.052804	-85.618594	Medium High	Outfall	Unnamed Pond
PT 2803A	Unnamed Pond	43.050480	-85.612170	Medium High	Outfall	Unnamed Pond
PT 2803B	Unnamed Pond	43.050480	-85.611827	Medium High	Outfall	Unnamed Pond

<b>Outfall ID#</b>	<b>Point of Discharge</b>	<b>Latitude</b>	<b>Longitude</b>	<b>Priority</b>	<b>Outfall or Discharge Point</b>	<b>Ultimate Outfall</b>
PT 2804	Unnamed Pond	43.049642	-85.611909	Medium High	Outfall	Unnamed Pond
PT 2805	Unnamed Pond	43.049136	-85.612003	Medium High	Outfall	Unnamed Pond
PT 3008	Pine Creek/Grand River	43.049300	-85.654670	Medium High	Outfall	Pine Creek/Grand River
PT 3101	York Creek	43.032510	-85.669090	Medium High	Outfall	York Creek
PT 3102	York Creek	43.031860	-85.667900	Medium High	Outfall	York Creek
PT 3103	York Creek	43.031890	-85.667800	Medium High	Outfall	York Creek
PT 3104	Mill Creek	43.033500	-85.666400	Medium High	Outfall	Mill Creek
PT 3105	Mill Creek	43.033570	-85.666550	Medium High	Outfall	Mill Creek
PT 3106	Mill Creek	43.033580	-85.666540	Medium High	Outfall	Mill Creek
PT 3108	Mill Creek	43.033660	-85.666190	Medium High	Outfall	Mill Creek
PT 3109	Mill Creek	43.036470	-85.669000	Medium High	Outfall	Mill Creek
PT 3302	Unnamed Pond	43.038020	-85.628380	Medium High	Outfall	Unnamed Pond
PT 3303	Unnamed Pond	43.038060	-85.628350	Medium High	Outfall	Unnamed Pond
PT 3304	Unnamed Pond	43.036250	-85.628060	Medium High	Outfall	Unnamed Pond
PT 3306	Dean Lake	43.031330	-85.614740	Medium High	Outfall	Dean Lake
PT 3306B	Dean Lake	43.032510	-85.611080	Medium High	Outfall	Dean Lake
PT 3306C	Dean Lake	43.032530	-85.610760	Medium High	Outfall	Dean Lake
PT3401	Unnamed Pond	43.041540	-85.605220	Medium High	Outfall	Unnamed Pond
PT 3402	Unnamed Pond	43.040130	-85.604343	Medium High	Outfall	Unnamed Pond
PT 3403	Dean Lake	43.034040	-85.597760	Medium High	Outfall	Dean Lake
PT 3404	Dean Lake	43.034870	-85.604940	Medium High	Outfall	Dean Lake
PT 3405	Dean Lake	43.034030	-85.604470	Medium High	Outfall	Dean Lake
PT 3405B	Dean Lake	43.032940	-85.606590	Medium High	Outfall	Dean Lake
PT 3405C	Dean Lake	43.031200	-85.607440	Medium High	Outfall	Dean Lake

# Appendix 3

### What is Storm Water Runoff?

When it rains, storm water flows over lawns, streets, and parking lots. Storm water runoff can carry dirt, fertilizers, and motor oil into storm drains, which are often located alongside streets and parking lots.

### Where do Storm Drains Lead?

Storm drains lead directly to nearby rivers, streams, and lakes without any type of treatment.

### How Can I Help?

- Report anyone dumping anything down a storm drain.
- Take used motor oil to a quick lube or auto shop.
- Dispose of pet waste in a trash can.
- Avoid fertilizing your lawn before it rains.
- Wash your car on your lawn or take it to a commercial car wash.



Grand River, Grand Haven Harbor


[www.lowergrandriver.org](http://www.lowergrandriver.org)

# How to Report Water Pollution

## Citizen Report Form



Postage



## If you see anyone dumping anything into a storm drain, REPORT IT.

Any substance, trash, or debris dumped into a storm drain will travel to our streams and lakes, and eventually the Grand River. Motor vehicle fluids, paint, grass clippings, and restaurant wastes should be disposed of properly.

### Violators can be fined.

The Illicit Discharge Ordinance provides legal authority to enforce fines for violations. To report dumping, please fill out this report and return it in one of four ways.

1. E-mail: [wharall@kentcountyroads.net](mailto:wharall@kentcountyroads.net)
2. Fax: 616-242-6974
3. Phone: 616-2426914
4. Mail  
Name: Wayne A. Harrall  
Address: 1500 Scribner NW  
Grand Rapids MI 49504



**Date(s) pollution was observed:**

---

---

---

**Location pollution was observed (address, street, city or township):**

---

---

---

**Name of person(s) or company involved (if known):**

---

---

---

**Please describe the pollution (include photographs if possible):**

---

---

---

---

---

---

Please remember that all reports are investigated. Inspectors, however, are limited if a report is submitted anonymously as they cannot contact the submitter for more information.

If you would like to remain anonymous, it is highly recommended that you include photographs of the problem with your anonymous report.

**Your contact information (optional):**

Name: \_\_\_\_\_

Phone: \_\_\_\_\_

E-mail: \_\_\_\_\_

Address: \_\_\_\_\_

**Date this report was submitted:**

\_\_\_\_\_

Check here to receive a follow-up report.

Grass clippings blown into a storm drain

# WATER POLLUTION REPORT FORM

FOR KENT COUNTY ROAD COMMISSION EMPLOYEES

## Activities to Report.

As you perform your routine duties, if you observe anyone (landscapers, contractors, waste haulers, residents, etc.) dumping anything into a storm drain, report it. Storm drains lead directly to nearby stream and lakes, usually without any type of treatment. Our community is regulated by the state and federal governments, and we can be fined for failure to prevent and reduce the amount of pollutants entering the storm drain system. Motor vehicle fluids, paint and chemicals, yard waste, restaurant wastes, etc. should be disposed of properly. Only rainwater should enter a storm drain.

## Description of Pollution.

Date(s) pollution was observed: \_\_\_\_\_

Location of observed pollution (address, street):  
\_\_\_\_\_

Name of person(s) or company involved (if known):  
\_\_\_\_\_

Please describe the pollution (include photographs if possible):  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Date this report was submitted: \_\_\_\_\_

## Your Contact Information (optional).

Name, Title: \_\_\_\_\_

Phone: \_\_\_\_\_

Email: \_\_\_\_\_

## How to Return Form.

To report dumping, please fill out this report completely. Return it in one of four ways to our Storm Water Coordinator:

1. **Email:** WHARRALL@KENTCOUNTYROADS.NET
2. **Fax:** 616-242-6974
3. **Phone:** 616-242-6914
4. **Mail:** Wayne A. Harrall, 1500 Scribner NW, Grand Rapids, MI 49504


# WATER POLLUTION REPORT FORM

FOR KENT COUNTY ROAD COMMISSION EMPLOYEES

## EXAMPLES OF POLLUTION ENTERING THE STORM SEWER SYSTEM







**Board of County Road Commissioners  
of the County of Kent**

1500 Scribner Ave., N.W. Grand Rapids, MI 49504-3299  
(616) 242-6900 Fax # (616) 242-6980

Chairman  
Mark E. Rambo  
Vice-Chairman  
David M. Groenleer  
Commissioner  
Patrick G. Malone  
Commissioner  
William N. Stellin  
Commissioner  
Fritz Wahfield  
Steven A. Warren  
Managing Director  
John L. Strauss  
Director of Finance

Dear Concerned Citizen:

The Kent County Road Commission is implementing a program to improve water quality pursuant to state and federal environmental protection requirements. As part of the program, we are required to evaluate all municipal separate storm sewer outfalls to public waterways. Staff will have to walk along the rivers, streams and creeks, and perhaps use boats in wetlands and lakes, to access these outfalls. They will document the presence of flowing water from the storm sewer, observe odors or visual signs of pollution, conduct water quality analysis and photograph each outfall. Staff members are employed by the Kent County Road Commission.


Thank you for your interest in these water pollution control activities and cooperation with our staff. Any assistance of information you can provide to help protect our waterways is very much appreciated.

If you have any additional questions, please contact Wendy Ogilvie, FTC&H, 616-464-3915; [ewogilvie@ftch.com](mailto:ewogilvie@ftch.com).

Sincerely,

Wayne A. Harrall  
Director of Engineering  
616-242-6914

# Appendix 4



## Board of County Road Commissioners of the County of Kent

1500 Scribner Ave., N.W. Grand Rapids, MI 49504-3299  
(616) 242-6900 Fax # (616) 242-6980

Chairman  
Mark E. Rambo

Vice-Chairman  
David M. Groenleer

Commissioner  
Patrick G. Malone

Commissioner  
William N. Stellin

Commissioner  
Fritz Wahlfield

Steven A. Warren  
Managing Director

John L. Strauss  
Director of Finance

10/09/13

### IDEP Inter-jurisdictional Cooperation

State and federal law requires regulated Municipal Separate Storm Sewer Systems (MS4s) to have effective programs to find and eliminate illicit discharges to their systems (Illicit Discharge Elimination Plan). In some cases one community's MS4 discharges into another community's MS4.

We, as Storm Water Program Managers for our communities, recognize this requirement. We agree to work cooperatively with other MS4 communities where an illicit discharge is suspected to originate across our jurisdictional boundaries.

By signing this agreement, our community commits to investigating dry-weather discharges that appear at outfalls. We accept responsibility for notifying upstream owners if an illicit discharge is found to enter our MS4, and commit to abating discharges that are found to be leaving our MS4. These activities will be conducted pursuant to the procedures and timelines identified in the IDEP.

Wayne A. Harrall  
Director of Engineering  
Kent County Road Commission  
616-242-6914